

WISENMESHNET® 2.4GHz

Product Specification

Wisen Innovation Ltd

23rd August 2019

Revision History and Clarification

Rev.	Issue Date	Version Control	Written by	Revised by
V24	18/09/2016	1. Change from V23 to V24; 2. Small photo deleted from the feature table to save space; 3. Add more photos at the end of each table; 4. Delete the battery life from each production specification table and conclude them battery life session; 5. Add newly released product features, including: B-Type Gateway, Laser Distance Node, 2-Channel 4-20mA/1-5V Interface Node and 6-Channel Foil Gauge Node; 6. Add the battery life estimation charts for the new products; 7. Node data storage changed from "> 300 messages during meshing" to "Min. 450 Messages during Meshing".	Y.W.	Steve Thurgood
V25	18/09/2016	1. Text formatting 2. Adding B-Gateway 110-240VAC to 12VDC adapter, RS232 to USB, TTL to USB connection figures.	Y.W.	B.J.
V26	01/11/2016	Providing individual product specification documents and the combined version.	X.Y.H.; J.T.S.	Y.W.
V27	28/11/2016	Adding the new product Laser Tilt Node Specification. Adding the Mini Smart Gateway Specification.	X.Y.H.; J.T.S.	Y.W.
V28	24/07/2017	Adding Series number to each product Updating new Series-1F06 Leica Laser + the battery life Deleting the old Series-1E00 Laser node + the related battery life Updating new Series-1304 Mini Tilt + the battery life Rewording +/-10 degree and +/-30 degree rewording; Adding notice on B-Gateway internal battery life: "75% of the above values when there are more than 15 nodes taken under one gateway"	Y.W.	
V29	20/10/2017	1) Terminology Section: "ED_Level" and Remote Command Section: "ED_Value" changed to "Signal Threshold", same as software platform documentation; 2) B-Gateway Spec table, wrong description: "(Max. Current <= 2Amp)" changed to "Min. Current >= 2Amp"; 3) WISENMESHNET® Product Overview Section, Page 4, "6x Green/Blue/Red LEDs Onsite Triggering" changed to "Up to 5x Green/Blue/Red LEDs Onsite Triggering"; 4) Adding the latest B-Gateway V8.0 Version layout graph & SIM Card Orientation during inserting; 5) Adding Solar Unit and External Battery Unit.	X.Y.H.	Y.W.
V3.0	05/03/2018	1. Version control and change: 2018 - V3.0 instead of V30; 2. Deleting 1003 A-Gateway, 1303 Tilt & 6-Chanel Foil Gauge;	X.Y.H.	Y.W.

		<ol style="list-style-type: none"> All ER34615M battery is changed to ER34615 except 1F06 laser tilt node; Gateway daughter board interface added (WIFI/Ethernet) and deleted indoor adapter; 8-VW added in the VW Spec; Add Visual Node@page5; Add Visual Gateway@page5 		
V3.1	14/06/2018	<ol style="list-style-type: none"> 1F06 Laser: <ol style="list-style-type: none"> Add the instructions to "Laser_Pointing_Mode Switch"; Add the instructions to "Laser Front Lenses Protection Cover". Battery description has been improved to its full name, i.e., "3.6V Lithium primary D-Cell ER34615"; The node "Storage" word has changed to "Local Storage"; IP Rating changed to ">= IP66" from "IP66"; Change "Visual Gateway" word into "Camera Node". 	Y.W.	X.Y.H.
V3.2	18/01/2019	<ol style="list-style-type: none"> WISENMESHNET® Mini Dual-Axis Tilt Node (1302/1304 Series) @25°C, delete "Mini" in the title. Adding 1F07 1F08 in the Laser Distance Sensor Node; 1F06/07/08 node, Battery Power changed to "Qty. x 1 (3.6V Lithium primary D-Cell ER34615)" deleting M type; 	X.Y.H	Y.W.
V3.3	25/03/2019	<ol style="list-style-type: none"> Add Type 1600: YRP Tilt Node; Add Type 1510: 4-Channel Laser Distance Node; Add Type 1501 draft: Liquid Level Settlement Sensor Node. 	X.Y.H	Y.W.
V3.4	17/04/2019	<ol style="list-style-type: none"> 1600: YRP Tilt Node spec improvement; Highlighted yellow remove. 	X.Y.H	Y.W.
V3.5	14/05/2019	<ol style="list-style-type: none"> Unify the 1F06/07/08 name from Laser Distance Node to "Laser Tilt Sensor Node"; Revised features on the Radio Features; Add 1005 C-Gateway Spec. 	X.Y.H	Y.W.
V3.6	04/06/2019	<ol style="list-style-type: none"> All the product names are formalised; All the related temperature is corrected from (-40 to 80°C) to (-40 to 85°C) except laser related products; "Standard Aluminium Battery Holder" is emphasised to be "Standard Aluminium Battery Holder"; Add new 1305 type; 1600: Working current updated, "Sensitivity" corrected to "Resolution"; 1F07/1F08: Updated to -90° to +90°; 1501/1510: Weight separated into Node weight and sensor weight; 1501: resolution updated to 0.001mm; 1510: Laser_on photo updated. 	X.Y.H	Y.W.
V4.0	23/08/2019	<ol style="list-style-type: none"> Update: 1600 information; Add: 1005 Type C-Gateway: Available after 2019.11; Add: 1004 Type B-Gateway: End of production by 2019.11; Add: RS485 Daughter Board to Gateway; Add: Network Rail Approval Certificate; 	Y.W.	H.X.Y.

		6. Add: 1A07 1-VW Interface Node, delete 1A04;		
		7. Add: WISENMESHNET® Product Overview, RS485 Node.		

Contents

Terminology.....	6
WISENMESHNET® Product Overview	7
WISENMESHNET® Smart Gateway Series.....	8
1005/1004 Type - WISENMESHNET® C-Version/B-Version Smart Gateway	8
1003 Type - WISENMESHNET® Mini Smart Gateway	12
WISENMESHNET® Sensor Node Series.....	13
1302/1304/1305 Type - WISENMESHNET® Dual-Axis/Mini Dual-Axis/3-Axis Tilt Sensor Node	13
1600 Type - WISENMESHNET® YPR Tilt Sensor Node.....	16
1F06/1F07/1F08 Type - WISENMESHNET® Laser Tilt Sensor Node.....	20
1510 Type - WISENMESHNET® 4-Channel Laser Distance Sensor Node	24
1501 Type - WISENMESHNET® Liquid Level Settlement Sensor Node	27
WISENMESHNET® Interface Node Series	29
1A07/1A05/1A06 Type - WISENMESHNET® 1/4/8-Channel Vibrating Wire Interface Node	29
1C02 Type - WISENMESHNET® 2-Channel 4-20mA/1-5V Interface Node.....	32
1B02 Type - WISENMESHNET® 6-Channel 120Ω Foil Gauge Interface Node	34
Radio, Protocol, Battery Life, Remote Commands, Box Fixing.....	36
Point to Point Radio Feature	36
WISENMESHNET® Wireless Sensor Network Protocol Standard	36
Data Format.....	41
Remote Commands	41
Casing Back Hole Dimension.....	42
WISENMESHNET® External Power Units	43
M101 Type - WISENMESHNET® Solar Unit	43
M001/ M002 Type - WISENMESHNET® Battery Unit	46
WISENMESHNET® Visual/Camera Series.....	48
3001 Type - WISENMESHNET® Camera Node	48
3101 Type - WISENMESHNET® Visual Node	51

Terminology

Table of Terminology			
	English	中文	Abbreviation
Wireless Sensor Network Related			
1	Wireless Sensor Network	无线传感网络	WSN
2	Mesh Networking	网状网络	-
3	Ultra-Low Power	超低功耗	-
4	Artificial Intelligence	人工智能	AI
5	Hop	中继跳数	-
WSN Monitoring Related			
1	Sampling Time Interval	监测频率	T
2	Radio Frequency	无线频段	F
3	Back_Time	数据回传时间	-
4	Signal Threshold	入网信号强度门限值	-
5	Relay_Factor	中继时间	-
Product Related			
1	Smart Gateway	智能终端	Gateway/GW
2	WSN Dual-Axis Tilt Sensor Node	无线传感网络双倾角传感支点	Tilt Node
3	WSN Laser Distance Sensor Node	无线传感网络激光测距传感支点	Laser Distance Node
4	WSN Vibrating Wire Interface Node	无线传感网络振弦式采集支点	VW Interface Node
5	WSN 4-20mA/1-5V Interface Node	4-20mA/1-5V 无线传感网络采集支点	4-20mA/1-5V Interface Node
6	WSN 120Ω Foil Gauge Interface Node	120Ω 应变无线传感网络采集支点	120Ω FG Interface Node
7	WSN Visual Node	无线传感网络可视化功能支点	Visual Node
Sensor Related			
1	Vibrating Wire Gauge	振弦式应变传感器	VW Gauge
2	Foil Gauge	电阻式应变传感器	FG
Certificate Related			
1	Electromagnetic Compatibility	电磁兼容	EMC
2	London Underground Ltd Product Approval	伦敦地铁装备认证	LUL Approval
Material and Coating			
1	Epoxy Polyester Powder Coating	环氧聚酯树脂粉末涂料	-
2	Aluminium-Alloy Die Castings 12	铝合金压铸件 12	ADC12
3	Ingress Protection Rating	防护等级	IP

WISENMESHNET® Product Overview

WISENMESHNET® Node Series									
Sensor Node (S-Node) Series				Interface Node (I-Node) Series				Function Node (F-Node) Series	
Dual-Axis Tilt (1302)	Mini Dual-Axis Tilt (1304)	Laser Distance (1F06/07/08)	YPR Tilt (1600)	1/4/8-Channel Vibrating Wire (1A04/1A05/1A06)	2-Channel 4-20mA (1C02)	2-Channel 1-5V (1C02)	1/4-Channel RS-485 (15XX)	Visual Node	Camera Node
[-10,10]° Accuracy 0.01°	[-10,10]° 0.01°	[0.05,33]m 1.0mm	Yaw [0,360]° Pitch/Roll: [-89°,89°]	[400,6000]Hz 0.015%@Any Reading	[4,20]mA 0.1%@Any Reading	[1,5]V 0.1%@Any Reading	Laser; Rail Fall; Gas Level	Up to 3x Green/Blue/Red LEDs Onsite Triggering	3x Green/Blue/Red LEDs Onsite Triggering; 2M Pixel camera
WISENMESHNET® Smart Gateway Series (1004)									
Internal Battery (Non-rechargeable/Rechargeable)		Solar Power/AC Power		Mobile Network (default factory setting) 2G/2.5G/3G/4G Module		Standard RS232 Output 3 rd Party Converter: 232 to: 485/Ethernet/Fibre Optics/WIFI/433MHz Module, etc.			SD Storage: 1.5Yr Data
WISENMESHNET® Server									
Linux Server (Recommended) + Data FTP						Local Windows Server			
WISENMESHNET® Visualisation Platform									
Login Control	Summary Table	Data Plot	2D Site Planning	Mesh Topology	Data Exporting	Calibration Download	Remote Control	Warning	Project Management
Note: All Wisen products are powered by WISENMESHNET® Wireless Sensor Network Communication Protocol.									

WISENMESHNET® Smart Gateway Series

1005/1004 Type - WISENMESHNET® C-Version/B-Version Smart Gateway @25°C		
Basics	1005-C-Version Available after 2019.11	1004-B-Version End of production by 2019.11
Primary Battery Power	Qty. x 4 (3.6V Lithium primary D-Cell ER34615)	
Battery Connection	Standard Aluminium Battery Holder	
Secondary DC Power	7V - 32VDC (Min. Current >= 2Amp, e.g. 110-240VAC to 12VDC adaptor)	
Tertiary Power (External)	3.6VDC Battery Unit or Solar Unit	10.8VDC Battery Unit or Solar Unit
Mobile Network Stop Voltage	>= 2.65VDC	>= 5.50VDC
Local Storage	8GB (Min. 1.5 Yrs Storage)	
L x W x H	180 x 140 x 60mm	
Weight	<= 2.0kg	
Cable Gland	Qty. 1 x EMC-CMA12 for external RS232 connection Qty. 1 x EMC-CMA14 for external DC input power connection	
Wire Connection	DC In - Spring type wiring terminal	
External Interface		
Wireless Module	Compatible with 2G/2.5G/3G/4G of Micro SIM card	
Wired Port	RS232	
WSN Interface		
WSN Protocol	WISENMESHNET® Protocol	
Low Power Mode	T>=3min and Server Connection Ratio DTU_T = [1,99]T	
Standard System Parameter		
Temperature	Measurement Range: -40 to 85°C, Accuracy: +/-2°C	
Voltage	Accuracy: +/-0.1V	
Re-Calibration Method		
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)	
Industrial Standard		
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)	
IP Rating	>= IP66	
Operating Temperature	-40 to 85°C	
Fire Proof	Approved	
Certificates	CE, London Underground Product Approval	
Applications		
A gateway is used as a key unit in Wireless Sensor Network system. It is responsible for the command issuing (such as T, F modifications) to and data collection from all the nodes involved in a mesh network; meanwhile, it forwards the data and system information to the remote server via mobile network or the local server via standard RS232 connections.		
Non-Standard Accessory		
A. RS232 to USB connection cable from a gateway to a PC for local parameter configuration; [Software to use: WISENMESHNET® Standard Serial Port Software V3.0.11 or above]		
B. TTL to USB 1m cable to read the mesh data from a gateway in parallel to the mobile network data transmission;		

[Software to use: WISENMESHNET® Standard Serial Port Software V3.0.11 or above]

- C. Daughter board: 2/3/4G GSM interface board (by default), or Wi-Fi/Ethernet/RS-485 interface daughter board;
- D. Outdoor adaptor, IP68: 110-240VAC to 12VDC@5.0A.

Gateway PCB Layout

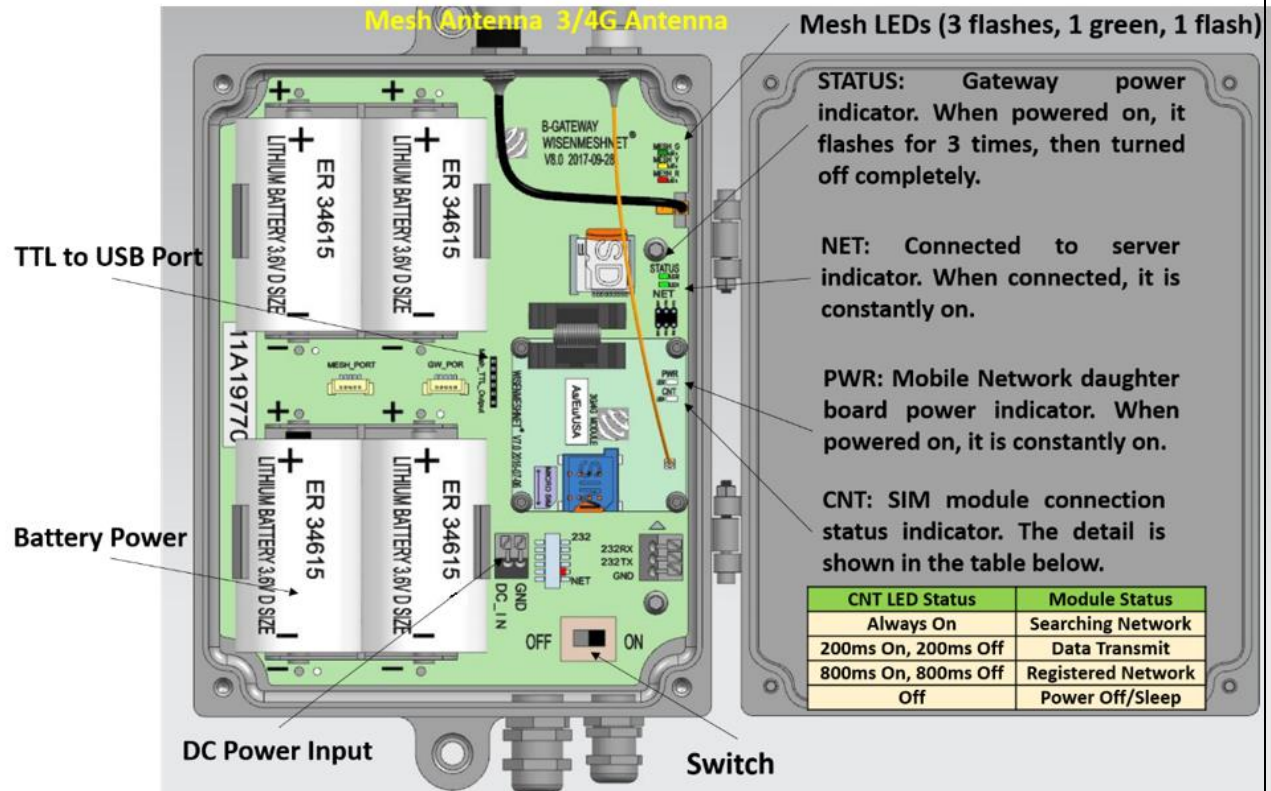


Figure. V8.0 B-Gateway Layout (Released after Feb. 2018).

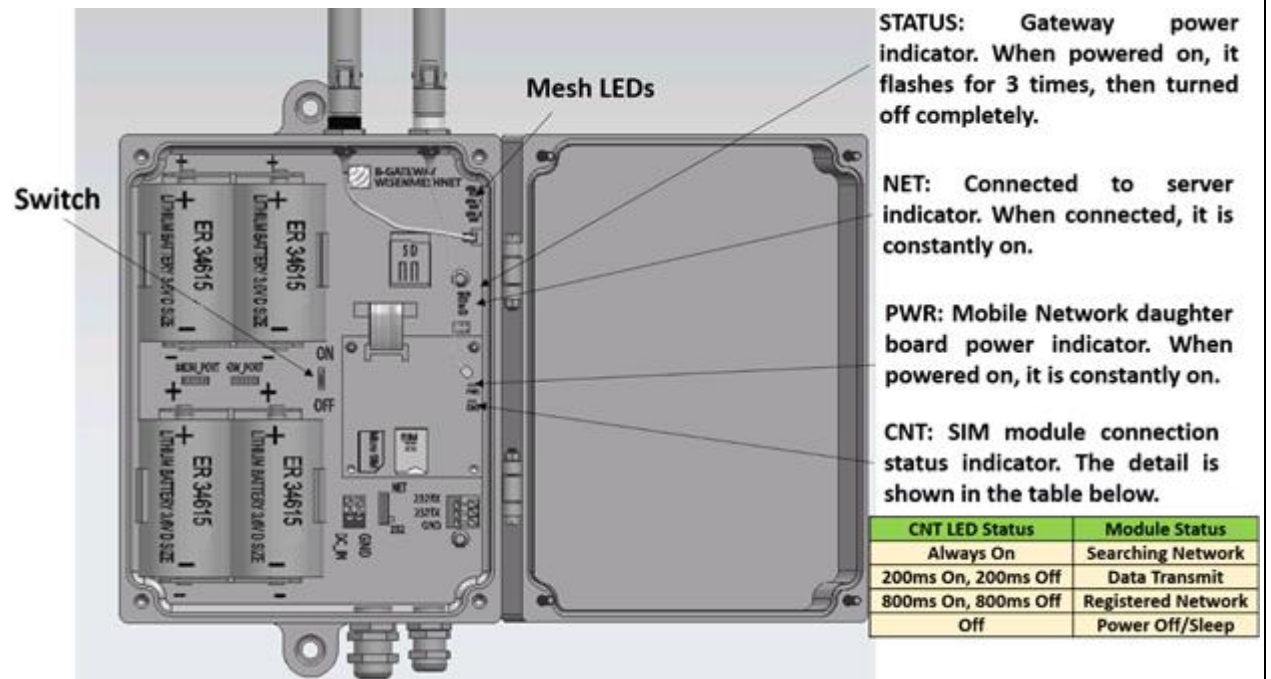


Figure. V7.0 B-Gateway Layout (Released after Oct. 2016).

Highlights

1. When connected to a remote server, "NET" LED will be constantly on;
2. Unlike A-Gateway which takes "IP Address" and "Port Number" as remote server destination, B-Gateway uses "Domain Name" and "Port Number" instead.



Figure. 110-240VAC to 12VDC@5A Adapter Connection.

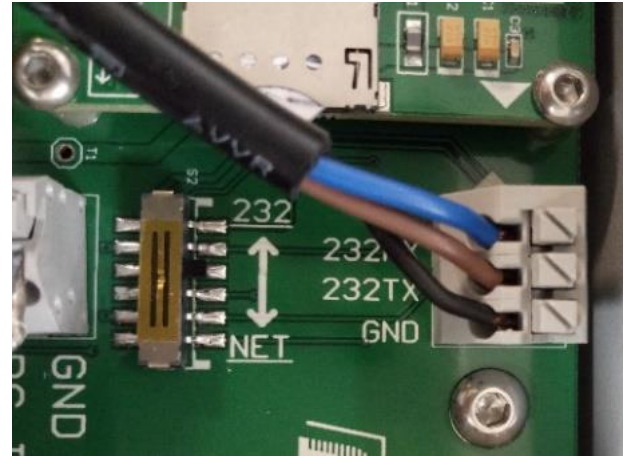


Figure. RS232 to USB Connection.



Figure. TTL to USB Connection.

Installation Guidance



Figure. C/B-Gateway Product Photos.

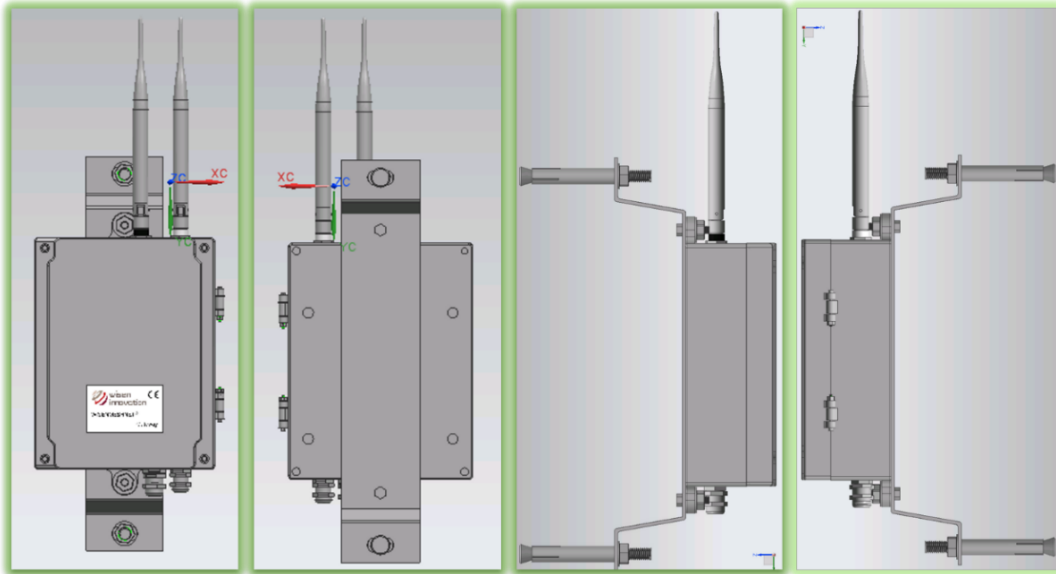


Figure. Gateway Fixing Bracket.

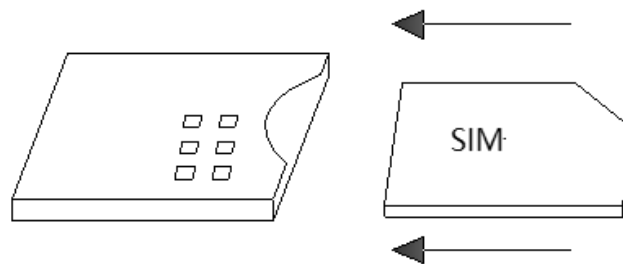


Figure. SIM Card Orientation.

1003 Type - WISENMESHNET® Mini Smart Gateway @25°C
Basics

Primary DC Power	USB 5VDC
L x W x H	52 x 50 x 40mm
Weight	< 80g
Cable Gland	Qty. 1 x USB Connection

External Interface

Wired Port	USB
------------	-----

WSN Interface

WSN Protocol	WISENMESHNET® Protocol
--------------	------------------------

Standard System Parameter

Temperature	Measurement Range: -40 to 85°C, Accuracy: +/-2°C
Voltage	Accuracy: +/-0.1V

Re-Calibration Method

Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
-------------------	--

Industrial Standard

Casing and Painting Materials	PC
Operating Temperature	-40 to 85°C

Applications

A gateway is used as a key unit in Wireless Sensor Network system. It is responsible for the command issuing (such as T, F modifications) to and data collection from all the nodes involved in a mesh network; meanwhile, it forwards the data and system information to the local PC via standard USB connection.

Non-Standard Accessory

- A. USB connection cable from a gateway to a PC for local parameter configuration. [Software to use: WISENMESHNET® Standard Serial Port Software V3.0.11 or above]

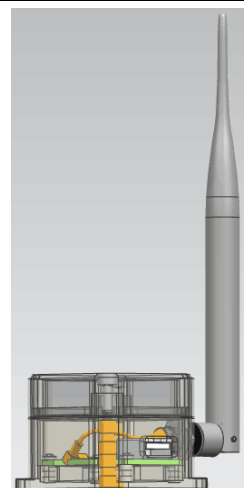
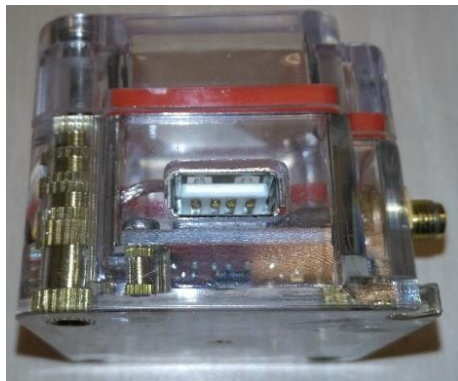
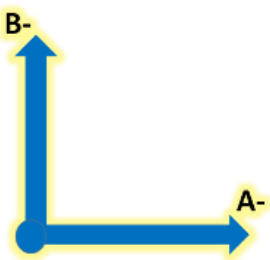
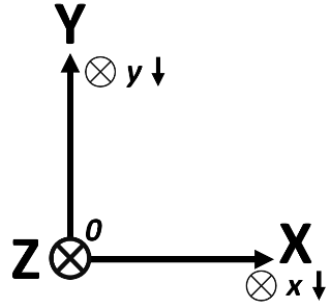



Figure. Mini Gateway Product Photo and the relate USB Connection.

WISENMESHNET® Sensor Node Series


1302/1304/1305 Type - WISENMESHNET® Dual-Axis/Mini Dual-Axis/3-Axis Tilt Sensor Node @25°C			
Basics	1302: S-Tilt End of production by 2019.11	1304: M-Tilt	1305: 3-Axis-Tilt Available after 2019.11
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)	Qty. x 1 (3.6V Lithium primary 2/3A ER17335)	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)
Accuracy Stop Voltage	2.7VDC		
Mesh Stop Voltage	2.1VDC		
Battery Connection	Standard Aluminium Battery Holder		
Working Current (DC)	Max. 23mA (Typ. 18mA)		Max. 17mA (Typ. 12mA)
Local Storage	Min. 450 Messages during Meshing		
L x W x H	80 x 75 x 57mm	52 x 50 x 40mm	80 x 75 x 57mm
Weight	0.43kg	98g	0.43kg
Primary Sensor			
Sensor Type	MEMS Dual-Axis Tilt Sensor, A-axis; B-axis Tilt Values		MEMS X/Y/Z Tilt Values
Range	-30° to +30°		-90° to +90°
Accuracy	0.01° (36" or 0.1745mm/m) for readings within range [-10°, +10°]; 0.04° (144" or 0.700mm/m) for readings within range [-30°, +30°]		Better than 0.01° (36" or 0.1745mm/m) over 1°
Resolution	0.0025° (9" or 0.0436mm/m)		0.001° (3.6" or 0.01745mm/m)
Long Term Stability	< 0.014° (50" or 0.2443mm/m)		
Standard System Parameter			
Temperature	Range: -40 to 85°C, Accuracy: +/- 2°C	Range: -40 to 85°C, Accuracy: +/-1°C, typical 0.5°C; Resolution: 0.1°C	
Voltage	Accuracy: +/- 0.1V		
WSN Interface			
WSN Protocol	WISENMESHNET® Protocol		
Industrial Standard			
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)	PC	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66		
Operating Temperature	-40 to 85°C		
Fire Proof	Approved		
Certificates	CE, London Underground Product Approval, Network Rail Approval		
Re-Calibration Method			
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)		
Tilting Orientation			

<p>Tilting Mark</p>		 <p>3-Axis Tilt Node (e.g., when X-axis arrow rotates around 0-dot into the paper plane, the readings of "x" decreases.)</p>
---------------------	---	---


As shown below, readings (of the blue axis) get smaller from Status 1 to Status 2; increase from Status 1 to Status 0.

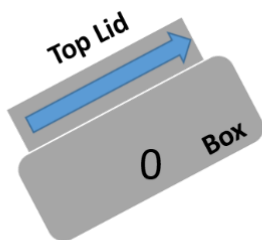

Reading Decreasing Toward +10°



Reading Close to 0°

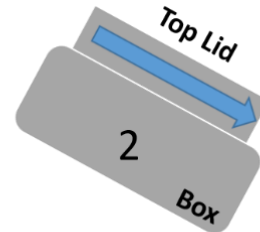

Reading Decreasing Toward -10°

Applications

Infrastructure tilting condition monitoring of accuracy 0.01°, such as retaining wall, supporting column, river embankment etc.

From the 1st level of data conversion, the movement of one end of a beam/crossbar can be monitored (with accuracy of 0.17mm/m), such as land sliding, railway track monitoring.

With our latest developed mathematical model, we can achieve a 0.3mm accuracy for the Horizontal Convergence of a metro tunnel of 6 segments.

Installation Guidance: Ensuring the tilt node is installed parallel to the horizontal ground plane.



Figure. Standard Dual-Axis Tilt Node Product Photos.

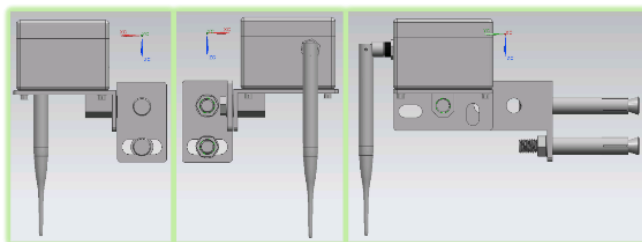


Figure. Rotational Fixing Bracket


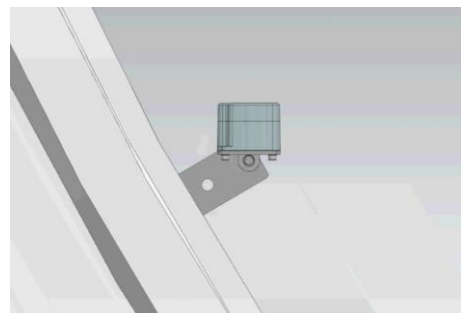


Figure. 1304 Series Mini Til



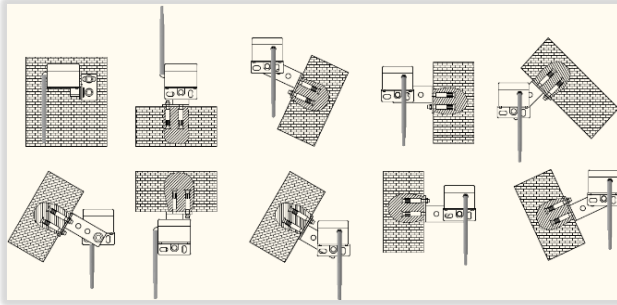


Figure. Levelling on Different Angular Walls (Ensuring the node is installed parallel to the horizontal ground plane).





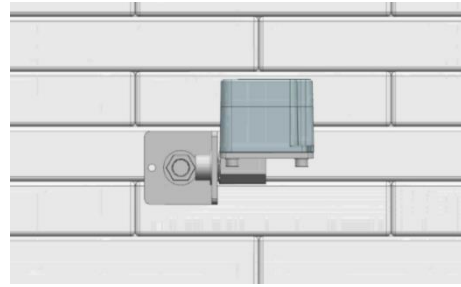


Figure. Levelling on Different Angular Walls (Ensuring the node is installed parallel to the horizontal ground plane).

1600 Type - WISENMESHNET® YPR Tilt Sensor Node @25°C		
Basics: Y.P.R. stands for Yaw, Pitch and Roll		
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)	
Accuracy Stop Voltage	2.7VDC	
Mesh Stop Voltage	2.1VDC	
Battery Connection	Standard Aluminium Battery Holder	
Working Current (DC)	Max. 30mA (Typ. 28mA)	
Local Storage	Min. 450 Messages during Meshing	
L x W x H	80 x 75 x 57mm	
Weight	0.43kg	
Primary Sensor		
Sensor Type	Yaw / Azimuth(North-based)	Pitch + Roll / X-axis; Y-axis; Z-axis Tilt
Range	[0°, 360°)	-90° to +90°
Accuracy	Better than +/-1.0°	Better than 0.01° (36" or 0.1745mm/m) over 1°
Resolution	0.1°	0.001° (3.6" or 0.01745mm/m)
Standard System Parameter		
Temperature	Range: -40 to 85°C; Accuracy: +/-1°C, typical: 0.5°C; Resolution: 0.1°C	
Voltage	Accuracy: +/- 0.1V	
WSN Interface		
WSN Protocol	WISENMESHNET® Protocol	
Industrial Standard		
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)	
IP Rating	>= IP66	
Operating Temperature	-40 to 85°C	
Fire Proof	Approved	
Certificates	-	
Re-Calibration Method		
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)	
YPR Orientations		
Yaw Pitch & Roll		

Yaw / Compass Mark	Pitch/Roll - Tilting Mark
 <p>Yaw: North: 0/360°(identical direction as the Yaw Arrow on the product label); East: 90°; South: 180°; West: 270°</p>	 <p>3-Axis Tilt (e.g., when X-axis arrow rotates around 0-dot into the paper plane, the readings of “x” decreases.)</p>

Earth Magnetic Field Intensity Distribution

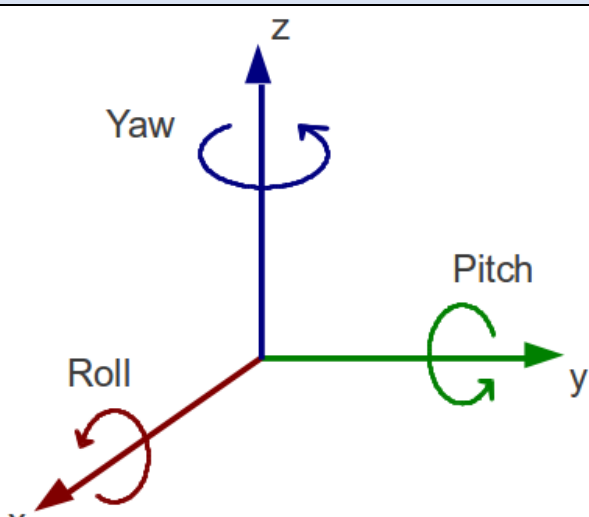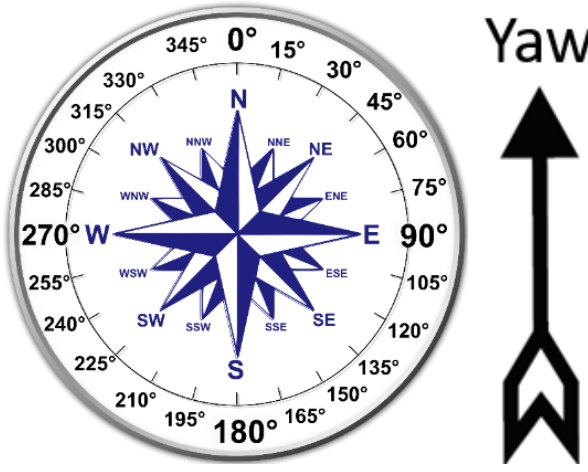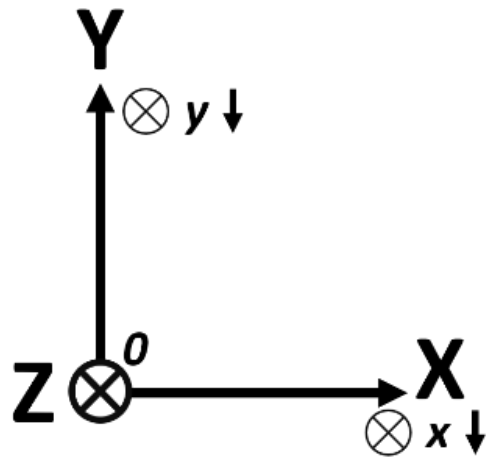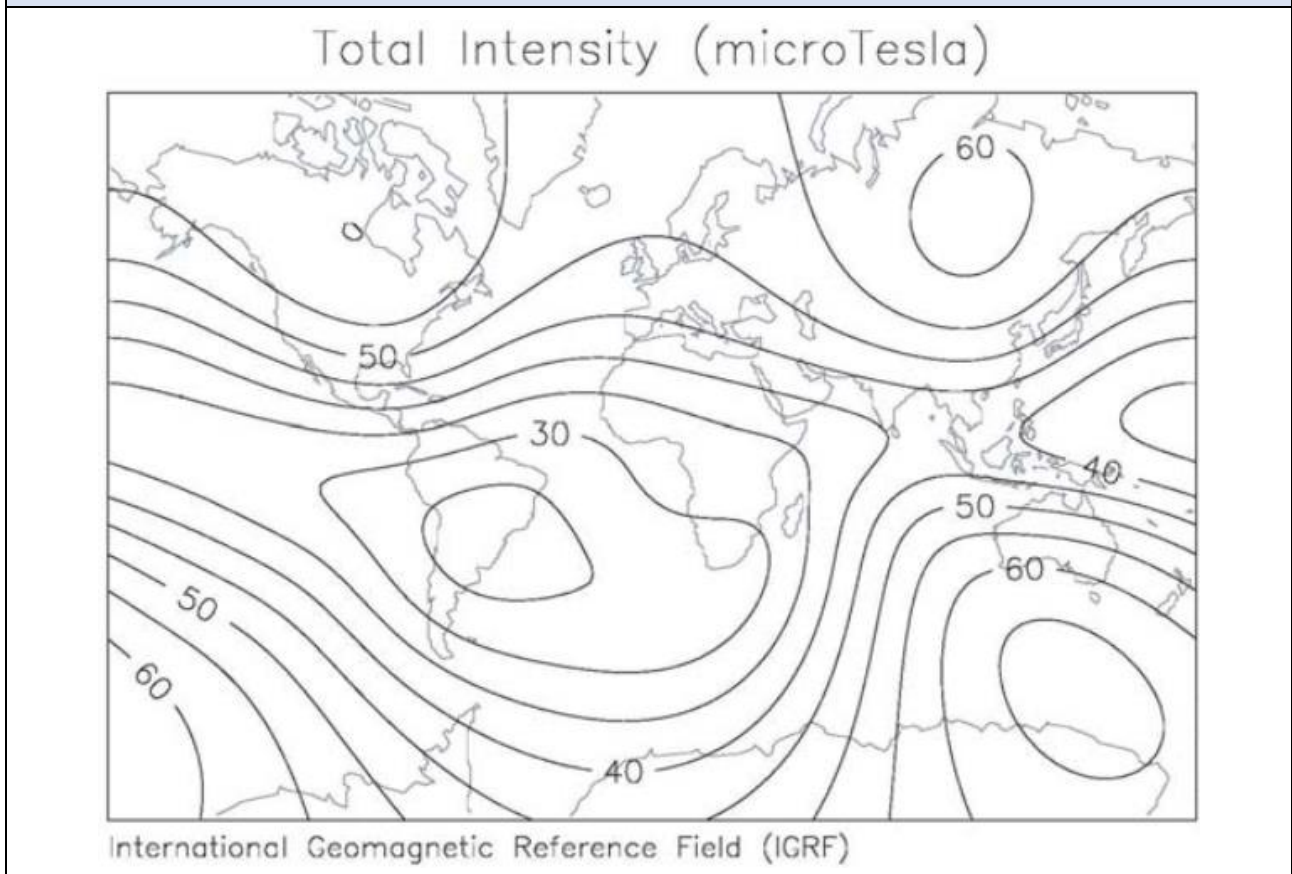

Compass On-site Calibration Procedures

Principle:

1. Accuracy: The Yaw value is merely depending on the correct measurements of Earth Magnetic Intensity;
2. Calibration: Any magnetic distortion that affects a node at a fixed relative direction of a fixed value (e.g., X uT) (providing X uT is < < the up limit of the sensor, i.e., 2500uT in this case), then the distortion can be

calibrated;

3. Stability: the measurements of Yaw can only be stable if the magnetic fields has no change (apart of the Earth Magnet due to node rotation) after the calibration.

Notice:

Magnetisable parts that is **NOT** able to fit into Principle 2, then it will severely affect the level of Calibration and hence the Yaw Accuracy. In this case, these parts must be **kept at a minimum 30cm plus away from a YPR node**;

Examples:

- A. Typical magnetisable parts: e.g., reinforced concrete, fence, etc.;
- B. Typical parts that can be calibrated: the accessories on a node, e.g., the stainless steel screws, rotation brackets, antennas, etc.

However please note! Accessories **MUST** be fixed on a node before any calibration begins (hence Principle 2).

Installation Procedures:

Step 1: Measurement Reference:

At the exact installation position, measure the surface orientation (i.e., Yaw) by a compass or the App on a smart phone, write down the reading (i.e., Yaw_ref).

Step 2: 90s Slow Preparation Buzzer (0.5s on + 1.5s off)

Fix the brackets and accessories (such as, screws and antennas) onto a node, power the node on and see all three mesh LEDs flashing 3 times. Then close the lid by tightening the 4 screws, then overturn the nodes 3 times so that the lid surface and the bottom surface can face upward 3 times respectively.

Step 3: 120s Quick Calibration Buzzer (0.5s on + 0.5s off):

Seq.	Lid Orientation	Antenna Connector Orientation	Slowly rotate a node around one axis shown on the label for 3 full circles (3s/circle)
1	Face to the customer	Points up	Round X-axis.
2		Points left	Round Y-axis shown on the label.
3		Points right	Round Y-axis shown on the label.

Note: iterate according to Seq. 1, 2 & 3 shown in the table above until "Confirmation Buzzer" is on.

Step 4: 10s Confirmation Buzzer:

Sound	Confirmation Flag in Data	Calibration Result
Single Beep (10 times)	Flag=0	Success
Double Beep (10 times)	Flag≠0. Redo calibration.	Failed

Step 5: Mesh Data Comparison:

Ensure the installed node is within $\pm 8^\circ$ offset from Yaw_ref recorded in Step 1;

Step 6: Error Flag Diagnostics:

For all the Flag $\neq 0$, please refer to “Error Flag Diagnostics Table”.

Error Flag Diagnostics Table (Based on at least 3 sets of data)

Flag ID	Description	Suggested Solution
0	Working	---
9	Calibration Failure due to incorrect calibration.	Strictly follow the procedures in “Wisen Specification” and recalibrate.
16	Node is restarted, no calibration is performed, the latest calibration has been successful and the latest calibration setting is reused.	Compare the YPR data with before, if it matches, then no need for any further actions, or strictly follow the procedures in “Wisen Specification” and recalibrate.
24/25/26/ 27	Module of Magnet Vector > 2500uT.	Keep node away from the magnet disturbance , then strictly follow the procedures in “Wisen Specification” and recalibrate.
Rest	Module of Magnet Vector \notin [20uT, 61uT), or Module of Acceleration Vector \notin [0.9g, 1.1g], or Self-test failed.	Keep the node away from the magnet/vibration disturbance , then strictly follow the procedures in “Wisen Specification” and recalibrate.

Note: after 2-3 rounds of actions done in the table above, if the Error Flag is identical among themselves, then it leads to a potential hardware failure, which is usually caused by a direct contact to a strong magnet.

Applications

Installing in none-magnetisable structure for long term Euler angles (Yaw, Pitch and Roll) monitoring, such as Tree monitoring.

Installation Guidance:



Figure. YPR Tilt Sensor Node Product Photos.


1F06/1F07/1F08 Type - WISENMESHNET® Laser Tilt Sensor Node @25°C			
Basics	1F06: D-Tilt (2-Axis)	1F07: D-Tilt (3-Axis) (Available in 2019.12)	1F08: D-Tilt (3-Axis)
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)		
Accuracy Stop Voltage	2.7VDC		
Mesh Stop Voltage	2.1VDC		
Battery Connection	Standard Aluminium Battery Holder		
Working Current (DC)	Max. 500mA (Typ. 220mA)		
Local Storage	Min. 450 Messages during Meshing		
L x W x H	100 x 100 x 60mm		
Weight	<= 0.65kg		
Primary Sensor			
Sensor Type	Distance		
Laser Class	Class 2		
Laser Range	0.05m-33m		0.05m-100m
Laser Accuracy	Better than +/-1.0mm (Typical 0.5mm)		
Laser Resolution	0.1mm		
Laser Lens Durability	>= 500Hrs@3Hz@50°C or 2500Hrs@3Hz@25°C		
Standard System Parameter			
Tilt Sensor	A-axis; B-axis Tilt Values	X-axis; Y-axis; Z-axis Tilt Values	
Tilt Range	Range: -30° - +30°; Accuracy: 0.04° (144" or 0.700mm/m); Resolution: 0.0025° (9" or 0.0436mm/m);	Range: -90° to +90°; Accuracy: better than 0.01° (36" or 0.1745mm/m) over 1°; Resolution: 0.001° (3.6" or 0.01745mm/m)	
Long Term Stability	< 0.014° (50" or 0.2443mm/m)		
Temperature	Range: -40 to 85°C; Accuracy: +/-1°C; Resolution: 0.1°C		
Voltage	Accuracy: +/-0.1V		
WSN Interface			
WSN Protocol	WISENMESHNET® Protocol		
Re-Calibration Method			
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)		
Industrial Standard			
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)		
IP Rating	>= IP66		
Operating Temperature	-10 to 50°C		
Fire Proof	Approved		
Certificates	CE		
Applications			
Long term distance monitoring between two specific points, such as horizontal convergence of a tunnel.			
Warning!			

- A. This is an automated system, the laser beam must be set to point at an appropriate non-reflective surface;
- B. The protection window glass on a node must be kept clear all the time;
- C. Distance 0mm starting plane: plane of the protection window glass.



Special Notice

Laser_Pointing_Mode Switch: It sets laser into pointing mode. By default, it is in switched off state (i.e., empty circle sign). Switch location is highlighted in the figure below.

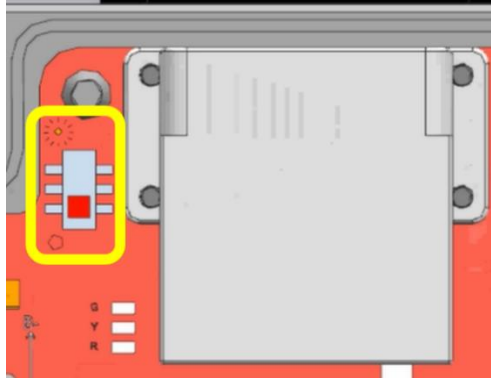



It can be switched on/off before/after a node's power-on. This pointing mode only becomes active after a valid laser reading is achieved.

Note: please do switch it off after an installation is completed, otherwise, the battery life is significantly shortened.

Laser front Lenses Protection Cover: All our laser nodes are shipped with their individual Protection Cover (of a 3M Double Coated Tissue Tape at one side). Once a battery is installed, node is powered on, and lid is screwed on properly. Then glue the cover onto the node as shown in the figure below. It protects the lenses from dust, heat and potential damage.



Error Code Instructions		
Code_Info	Description	Notice
00	Node is working in a good condition	-
01	Target moving too fast or beam interrupt	Repeat measurement, use tripod (@E260)
02	Signal too low or distance out of range	Use special target plate (@E255)
03	Signal too high	Avoid high reflecting surfaces (@E256)
04	Time out on reply	Cable may have gone loose or check if there is any bad physical connection or too far

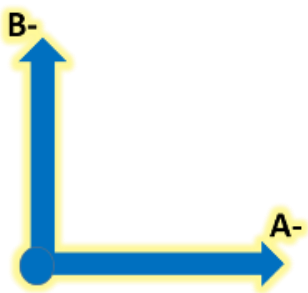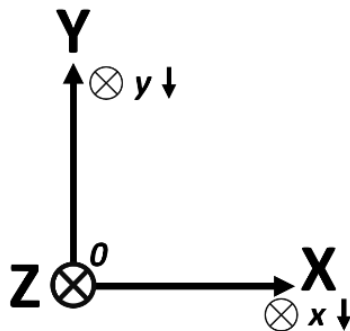		out of range (e.g., point to the sky) (Wisen)
05	Single reading achieved	Single success on the sampling procedure.
06	Max-Min>2xError Tolerance	The difference of sample values is too large, repeat measurement or use tripod. (Wisen)
07	Unknown command or wrong parameter	Use correct syntax (@E203)
08	Error on serial communication	Check communication (@E220)
09	Temperature too high	Cool down module (@E252)
10	Temperature too low	Warm up module (@E253)
11	Voltage supply too low	Improve voltage supply quality (@E254)
12	Too much background light	Protect target against sunlight (@E257)
13	Laser error	Module defect (@E284)
14	APD-voltage can't be adjusted correctly	Module defect (@E288)
15	Flash configuration error	Power down and up again (@E289)
16	Unknown command or wrong parameter from laser module	Change to a new battery (Wisen)
24	Checksum error	Change to a new battery (@E224)
74	No EEPROM detected, code has to be loaded by GSI	Change to a new battery (@E274)
76	Read of code from EEPROM wrong	Change to a new battery (@E276)
78	EEPROM error which appears if something goes wrong during the flashing of the firmware	Change to a new battery (@E278)
90	Calibration signal out of range	Change to a new battery (@E290)
Laser Time		The time period (in the unit of seconds) that a laser module has been switched on at each T. Typically, of value: 2-3s.
Sampling Status		The number of samples that has been successfully measured. Typically, of value: 5.
Tilting Orientation		
Tilting Mark	 <p>1F06 2-Axis D-Tilt (e.g., when A-axis arrow rotates around 0-dot into the paper plane, the readings of "a" decreases. Note: the minus sign "-" means reading decreases.)</p>	 <p>1F07/1F08 3-Axis D-Tilt (e.g., when X-axis arrow rotates around 0-dot into the paper plane, the readings of "x" decreases.)</p>
Installation Guidance		


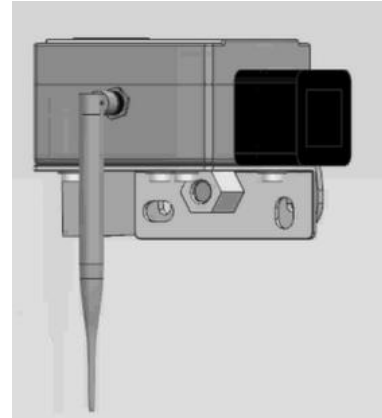



Figure. Laser Tilt Sensor Node Fixing Bracket (Please refer to the actual brackets in the shipment as the final).

1510 Type - WISENMESHNET® 4-Channel Laser Distance Sensor Node @25°C	
Basics	
Battery Power	Qty. x 4 (3.6V Lithium primary D-Cell ER34615)
Accuracy Stop Voltage	2.7VDC
Mesh Stop Voltage	2.1VDC
Battery Connection	Standard Aluminium Battery Holder
Working Current (DC)	Max. 524mA (Typ. 197mA)
Local Storage	Min. 450 Messages during Meshing
L x W x H	4 Channel Interface Node: 180 x 140 x 60mm Laser Distance Unit: 80 x 75 x 57mm
Node Weight	1.3kg
Laser Distance Unit	0.37kg x Qty. 4 (Excluding brackets and cables)
Cable Gland	Qty. 4 x EMC-CMA12
Wire Connection	Spring type wiring terminal
Primary Sensor	
Sensor Type	Distance
Laser Class	Class 2
Laser Range	0.05m-33m
Laser Accuracy	Better than +/-1.0mm (Typical 0.5mm)
Laser Resolution	0.1mm
Laser Lens Durability	>= 500Hrs@3Hz@50°C or 2500Hrs@3Hz@25°C
Standard System Parameter	
Temperature	Range: -40 to 85°C; Accuracy: +/-1°C; Resolution: 0.1°C
Voltage	Accuracy: +/-0.1V
WSN Interface	
WSN Protocol	WISENMESHNET® Protocol
Re-Calibration Method	
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
Industrial Standard	
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-10 to 50°C
Fire Proof	Approved
Certificates	-
Applications	
Long term distance monitoring between two specific points, such as horizontal convergence of a tunnel. Note: it does not contain any tilt readings as our 1Fxx series.	
Warning!	
A. This is an automated system, the laser beam must be set to point at an appropriate non-reflective surface; B. The protection window glass on a node must be kept clear all the time; C. Distance 0mm starting plane: plane of the protection window glass.	
	

Special Notice

Laser_Pointing_Mode Switch: It sets laser into pointing mode. By default, it is in switched off state (i.e., empty circle sign). Switch location is highlighted in the figure below.

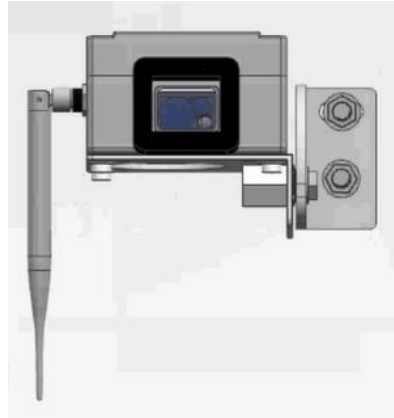

It can be switched on/off before/after a node's power-on. This pointing mode only becomes active after a valid laser reading is achieved.

Note: please do switch it off after an installation is completed, otherwise, the battery life is significantly shortened.

Laser front Lenses Protection Cover: All our laser nodes are shipped with their individual Protection Cover (of a 3M Double Coated Tissue Tape at one side). Once a battery is installed, node is powered on, and lid is screwed on properly. Then glue the cover onto the node as shown in the figure below. It protects the lenses from dust, heat and potential damage.

Error Code Instructions

Code_Info	Description	Notice
00	Node is working in a good condition	-
01	Target moving too fast or beam interrupt	Repeat measurement, use tripod (@E260)
02	Signal too low or distance out of range	Use special target plate (@E255)
03	Signal too high	Avoid high reflecting surfaces (@E256)
04	Time out on reply	Cable may have gone loose or check if there is any bad physical connection or too far out of range (e.g., point to the sky) (Wisen)
05	Single reading achieved	Single success on the sampling procedure.
06	Max-Min>2xError Tolerance	The difference of sample values is too large, repeat measurement or use tripod. (Wisen)
07	Unknown command or wrong parameter	Use correct syntax (@E203)
08	Error on serial communication	Check communication (@E220)
09	Temperature too high	Cool down module (@E252)
10	Temperature too low	Warm up module (@E253)
11	Voltage supply too low	Improve voltage supply quality (@E254)
12	Too much background light	Protect target against sunlight (@E257)
13	Laser error	Module defect (@E284)
14	APD-voltage can't be adjusted correctly	Module defect (@E288)
15	Flash configuration error	Power down and up again (@E289)

16	Unknown command or wrong parameter from laser module	Change to a new battery (Wisen)
24	Checksum error	Change to a new battery (@E224)
74	No EEPROM detected, code has to be loaded by GSI	Change to a new battery (@E274)
76	Read of code from EEPROM wrong	Change to a new battery (@E276)
78	EEPROM error which appears if something goes wrong during the flashing of the firmware	Change to a new battery (@E278)
90	Calibration signal out of range	Change to a new battery (@E290)
Laser Time		The time period (in the unit of seconds) that a laser module has been switched on at each T. Typically, of value: 2-3s.
Sampling Status		The number of samples that has been successfully measured. Typically, of value: 5.

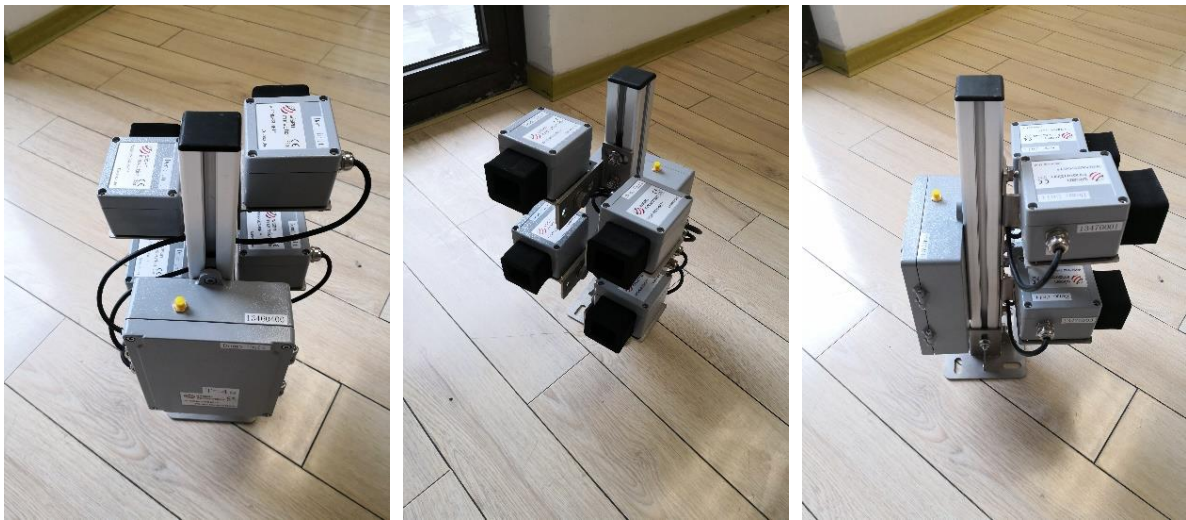
Product Photo


Figure. 4-Channel Laser Distance Sensor Node.

1501 Type - WISENMESHNET® Liquid Level Settlement Sensor Node @25°C	
Basics	
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)
Accuracy Stop Voltage	2.7VDC
Mesh Stop Voltage	2.1VDC
Battery Connection	Standard Aluminium Battery Holder
Working Current (DC)	Max. 160mA (Typ. 100mA)
Local Storage	Min. 450 Messages during Meshing
L x W x H	Interface Node: 100 x 100 x 60mm Liquid level settlement sensor: depending on the measurement range in mm.
Node Weight	0.45kg
Settlement Gauge Weight	Range: 100mm (Approx. 3kg)/200mm (Approx. 4kg)/300mm(Approx. 5kg). (Excluding the brackets and liquid tubes)
Primary Sensor	
Sensor Type	Vertical Settlement
Range	100/200/300/400/500mm
Accuracy	1.0mm (Typical 0.5mm)
Resolution	0.1mm
Standard System Parameter	
Temperature	Range: -40 to 85°C; Accuracy: +/-1°C; Resolution: 0.1°C
Voltage	Accuracy: +/-0.1V
WSN Interface	
WSN Protocol	WISENMESHNET® Protocol
Re-Calibration Method	
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
Industrial Standard	
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-40 to 85°C
Fire Proof	Approved
Certificates	-
Applications	
Ground settlement monitoring: A minimum of two settlement sensor nodes are applied, with one as the reference point and other(s) as the vertical movement measurement point. Sensor compatible: http://www.bsil.com.cn/english/view.php?id=15	
Product Photo	



Figure. Liquid Level Settlement Node.

WISENMESHNET® Interface Node Series

1A07/1A05/1A06 Type - WISENMESHNET® 1/4/8-Channel Vibrating Wire Interface Node @25°C		
Basics	1A07: 1 x VW Interface Node	1A05/1A06: 4/8 x VW Interface Node
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615)	Qty. x 2 (3.6V Lithium primary D-Cell ER34615)
Accuracy Stop Voltage	2.1VDC	
Mesh Stop Voltage	2.1VDC	
Battery Connection	Standard Aluminium Battery Holder	
Working Current (DC)	Max. 100mA (Typ. 98mA)	
Local Storage	Min. 450 Messages during Meshing	
L x W x H	100 x 100 x 60mm	180 x 140 x 60mm
Weight	0.60kg	1.20kg
Cable Gland	Qty. 1 x EMC-CMA12 for external VW sensor connection	Qty. 4/8 x EMC-CMA12 for external VW sensor connections
Wire Connection	Spring type wiring terminal	
Externally Connected VW Sensor		
Sensor Type	Vibrating Wire Typed	
No. of Inputs	1 Channel	4/8 Channels
Sensor Connection	VW Type of 5 wires: VW+, VW-, T+, T-, GND. Note: Temperature wires (or a 3kΩ resistor) must be connected to the T+ & T- terminals so VW node can work properly; Ground wire between a node and a sensor must be connected.	
Parameter	Resonant Frequency (Hz)	
Range	400 to 6000Hz	
Accuracy	0.015% at Any Reading	
Resolution	0.002Hz@400Hz or 0.05Hz@6000Hz	
Cable Length	<= 1.1km	
External Thermistor Sensor		
Parameter	Thermistor Resistor of 3kΩ@25°C	
Range	0.052kΩ to 113.096 kΩ	
Accuracy	0.12kΩ or 2°C	
Standard System Parameter		
Temperature	Range: -40 to 85°C, Accuracy: +/-1°C, typical: 0.5°C; Resolution: 0.1°C (Note: Only available in 1A07 Type)	
Voltage	Accuracy: +/-0.1V	
WSN Interface		
WSN Protocol	WISENMESHNET® Protocol	
Re-Calibration Method		
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)	
Industrial Standard		

Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-40 to 85°C
Fire Proof	Approved
Certificates	CE, London Underground Product Approval

Applications

WISENMESHNET® VW interface node is Compatible with all different brands & types of high quality Vibrating Wire sensors, therefore it can be applied in all different related monitoring projects.

Examples of VW sensors: Strain Gauge; Displacement Transducers; Piezometers; Settlement Sensors; Pressure Cells; Load Cells. Suggested VW sensor supplier: <http://www.soilinstrument.com/>

Installation Guidance

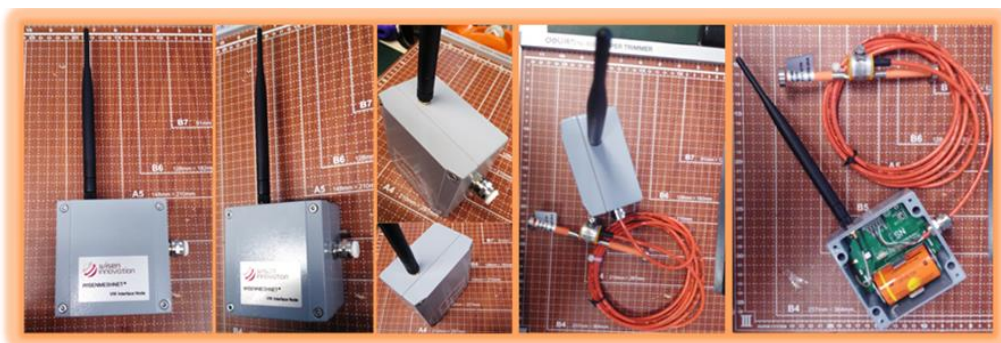


Figure. 1-Channel VW Interface Node Product Photos.

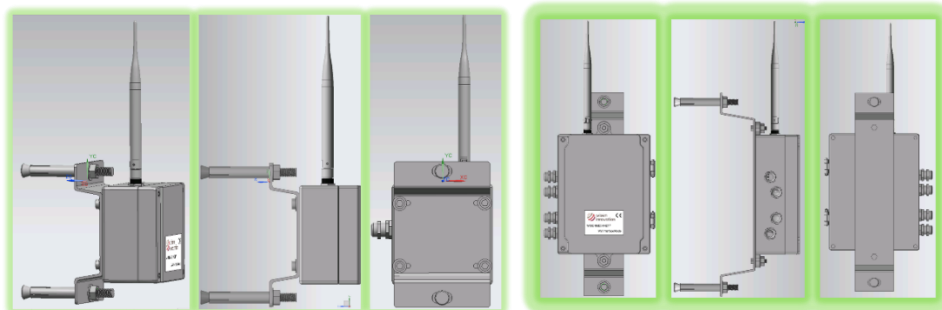


Figure. 1-Channel VW Interface Node Brackets.

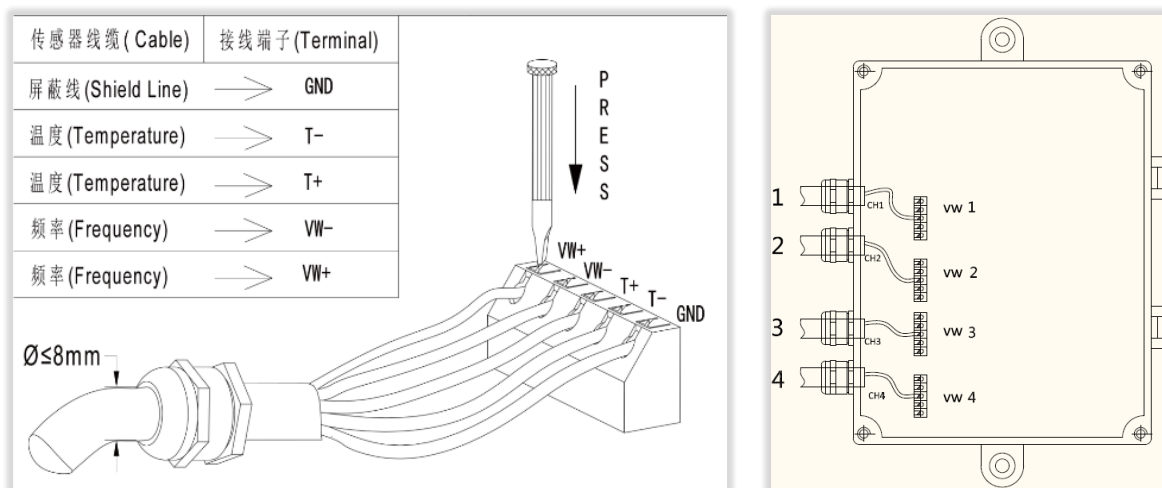



Figure. Left: VW Sensor Connections (VW+, VW-, T+, T-, GND). Right: Sensor Channel Sequence on a 4-Channel VW Interface Node.

1C02 Type - WISENMESHNET® 2-Channel 4-20mA/1-5V Interface Node @25°C	
Basics	
Battery Power	Qty. x 4 (3.6V Lithium primary D-Cell ER34615)
Alternative DC Input	12-32VDC@min. 1A
DC Output	12VDC±0.3V @max. 0.3A (Note: confirm against the sensor specification)
Power On Time to External Sensor	2s to reach stable reading (Note: confirm the sensor stable time before use)
Accuracy Stop Voltage	5.9VDC
Mesh Stop Voltage	4.0VDC
Battery Connection	Standard Aluminium Battery Holder
Local Storage	Min. 450 Messages during Meshing
L x W x H	180 x 140 x 60mm
Weight	1.5kg
Cable Gland	Qty. 2 x EMC-CMA12 for external sensor connections Qty. 1 x EMC-CMA12 for external DC input power connection
Wire Connection	Spring type wiring terminal
Externally Connected Sensor	
Sensor Type	4-20mA / 1-5V Sensor Type
No. of Inputs	2 Channels
Sensor Connection	DC_Out, IN, GND
Parameter	mA / V (Use "4-20mA to 1-5V Switch" for each channel on the PCB to change the sampling parameter.)
Range	4.0000 to 20.0000mA / 1.0000V to 5.0000V
Accuracy	0.1% at Any Reading
Resolution	0.0003mA or 0.0001V
Cable Length	<= 4.5m
Standard System Parameter	
Temperature	Range: 40 to 85°C, Accuracy: +/-2°C
Voltage	Accuracy: +/-0.1V
Re-Calibration Method	
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
WSN Interface	
WSN Protocol	WISENMESHNET® Protocol
Industrial Standard	
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-40 to 85°C
Fire Proof	Approved
Certificates	CE, London Underground Product Approval
Applications	
WISENMESHNET® 4-20mA/1-5V Interface Node is compatible with all different types of 4-20mA/1-5V sensors of 12VDC and <=300mA power supply, hence it can be applied to all the corresponding monitoring projects. Example of 4-20mA sensors: Manufacturer such as Micro-Epsilon. http://www.micro-epsilon.com/temperature-	

<sensors/index.html?sLang=us>

Special Notice on data format corresponding to the 4-20mA/1-5V Switch

Switch Status	CH1 Reading	CH2 Reading
00	1-5V	1-5V
01	4-20mA	1-5V
02	1-5V	4-20mA
03	4-20mA	4-20mA

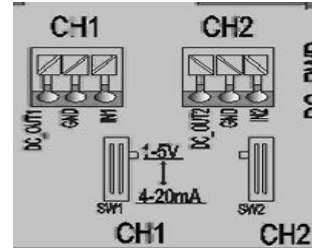

Installation Guidance



Figure. 2-Channel 4-20mA/1-5V Interface Node Product Photos.

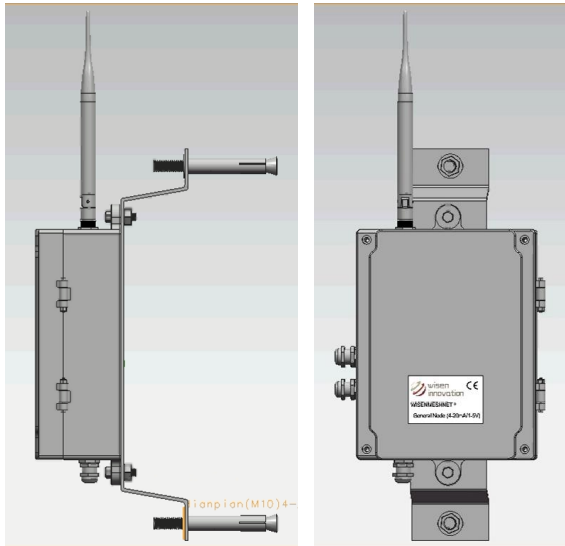


Figure. Fixing Brackets.

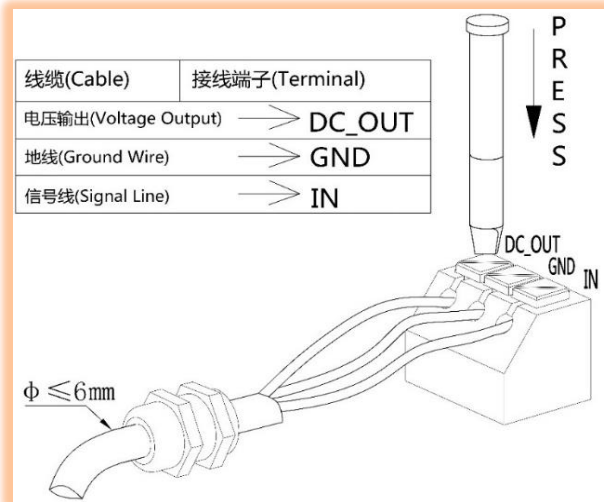


Figure. Individual 4-20mA/1-5V Sensor Wire Connections

1B02 Type - WISENMESHNET® 6-Channel 120Ω Foil Gauge Interface Node @25°C	
Basics	
Battery Power	Qty.x2 (3.6V Lithium primary D-Cell ER34615)
Accuracy Stop Voltage	2.7VDC
Mesh Stop Voltage	2.1VDC
Working Current (DC)	Max. 78mA (Typ. 46mA)
Battery Connection	Standard Aluminium Battery Holder
Local Storage	Min. 450 Messages during Meshing
L x W x H	180 x 140 x 60mm
Weight	1.2kg
Cable Gland	Qty. 2 x EMC-CMA12 for external sensor connections
Wire Connection	Spring type wiring terminal
Externally Connected 120Ω Foil Gauge Sensor Parameter	
Sensor Type	120Ω Foil Gauge
No. of Inputs	6 Channels
Sensor Connection	IN+, IN-
Sampling Bridge Arrangement	1/4 Bridge
Parameter	Resistance in Ω
Range	119.0 to 121.0 Ω
Accuracy	0.1% ± 0.0005 Ω
Resolution	< 0.001 Ω
Stability	±0.0005 Ω
Cable Length	<= 3m
Standard System Parameter	
Temperature	Range: -40 to 85°C, Accuracy: +/-2°C
Voltage	Accuracy: +/-0.1V
Re-Calibration Method	
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
WSN Interface	
WSN Protocol	WISENMESHNET® Protocol
Industrial Standard	
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-40 to 85°C
Fire Proof	Approved
Certificates	CE
Applications	
WISENMESHNET® 120Ω Foil Gauge Interface Node is compatible with all 120Ω Foil Gauge sensors, hence it can be applied to all the related monitoring projects.	
Installation Guidance	

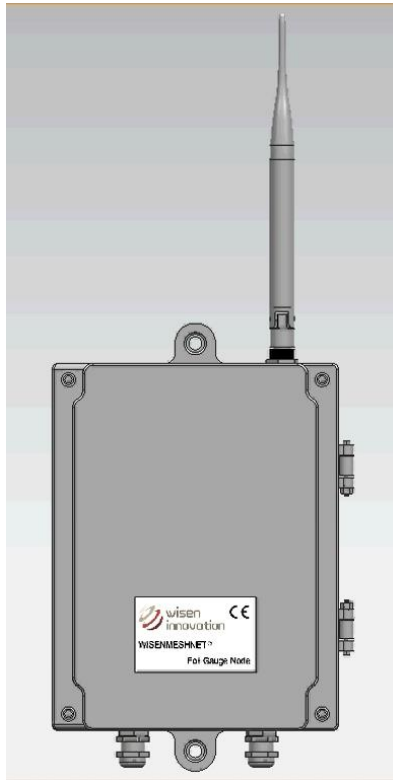


Figure. 6-Channel 120Ω Foil Gauge Interface Node Product Photos.



Figure. Fixing Brackets.

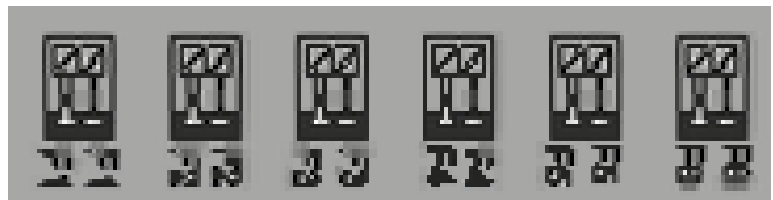


Figure. Individual Wire Connections

Radio, Protocol, Battery Life, Remote Commands, Box Fixing

Point to Point Radio Feature

Radio Frequency	2.405 - 2.480GHz (16 Channels of 5MHz Bandwidth)	
Channel Setting	Channel 26 by default	
Transmission Speed	250kb/s	
Transmit Power	Typical <1.4mW (i.e., 1.5dBm); Max. 2mW	
Receive Resolution	-102dBm to -80dBm	
No. of Mesh Hop Supported	10 Hops (e.g., the radio link from a gateway to the 1 st layer node is called the 1 st hop)	
Sampling Interval	1-60mins	
Antenna Description	2.4GHz-Antenna	Omni-directional 5dBi (20cm in length) or Customised
	2/2.5/3/4G-Antenna	Omni-directional 3.5dBi (20cm in length) or Customised
	Antenna Connector	SMA (M)


WISENMESHNET® Wireless Sensor Network Protocol Standard

Electromagnetic Compatibility


WISENMESHNET® system is designed of ISM2.4GHz, it strictly follows IEEE802.15.4 Standard, which includes 16 channels (Channel 11 to Channel 26 representing 2.405GHz to 2.480GHz) of 5MHz bandwidth at each channel.

Channels Definition:

The 802.15.4 standard divides the 2.4GHz ISM band into 16 non-overlapping channels, which are 5MHz apart as shown in the following figure.

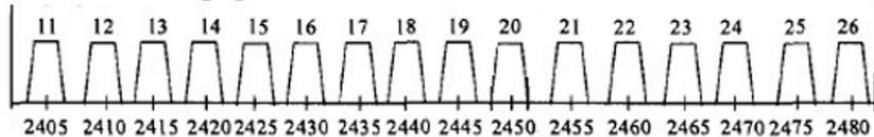

To minimise the possible interference between WIFI and WISENMESHNET®, the following channels can be selected for this purpose.

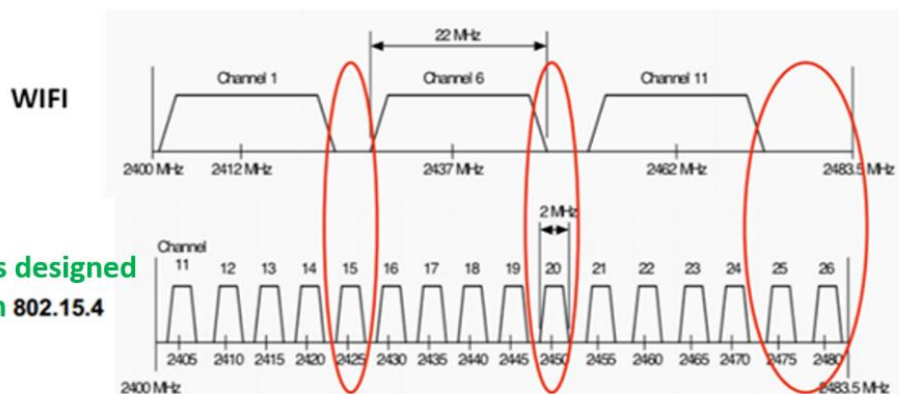



WISENMESHNET is designed based on 802.15.4

Notice: Within any electrically noisy environment, nodes with sensors must be $\geq 0.3\text{m}$ away from the source of the noise.

Network Life Span


Laboratory Power Consumption Analysis (please apply the data below ONLY as a reference)

Hardware Settings: Keysight 34401A Multimeter; Atten APS3005D Power Supply; Windows PC.

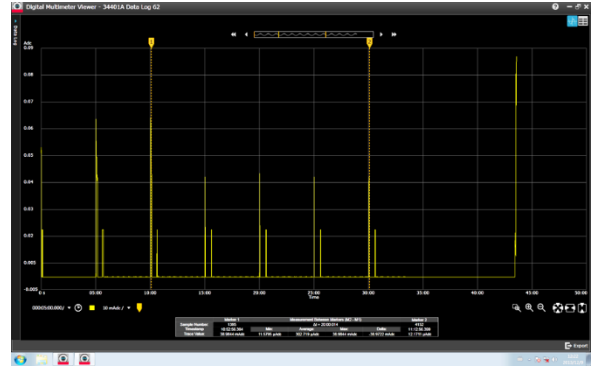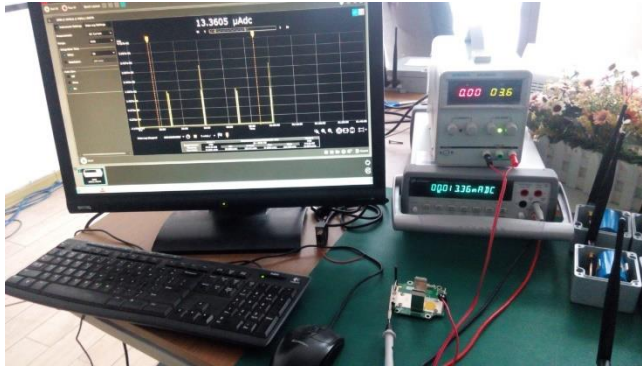


Mini Dual-Axis Tilt Sensor Node/ Standard Dual-Axis Tilt Sensor Node/ 1-Channel VW Interface Node/ 4-Channel VW Interface Node:

Best Case: It is the battery life calculated for a node taking no sub-mesh network of its own, i.e., a leaf node.

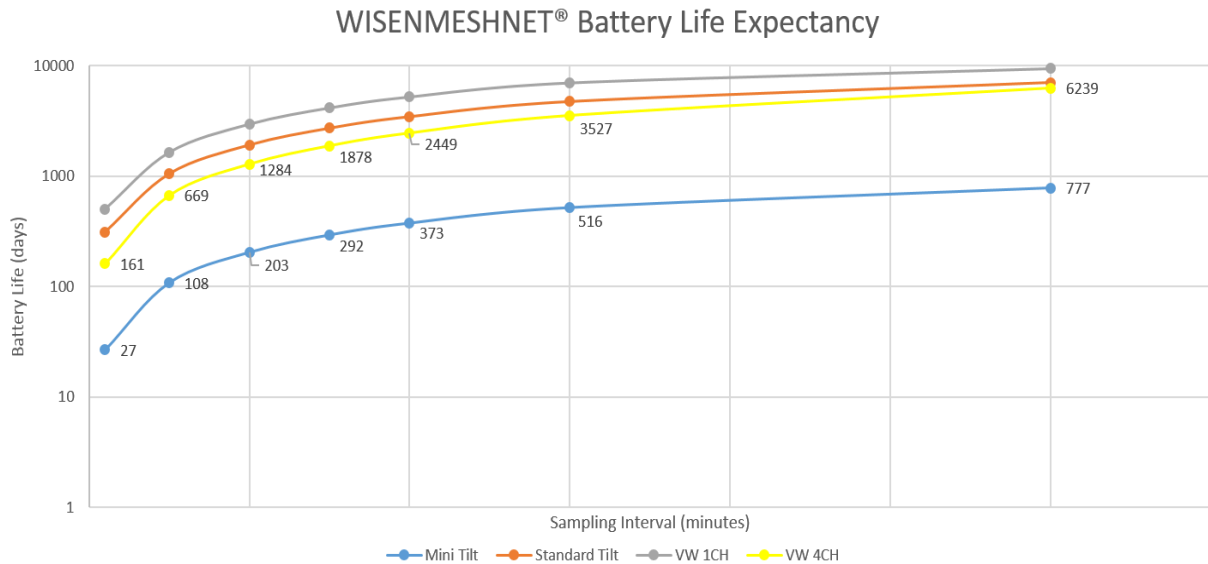

Note: the figure above shows the battery life of 1303 Series Mini Tilt. Under the same circumstances, 1304 Series Mini Tilt node has 30-35% more battery life than 1303 Series Mini Tilt node.

Worst Case: It is the battery life calculated for a node taking 9 hops of sub-mesh network of its own.

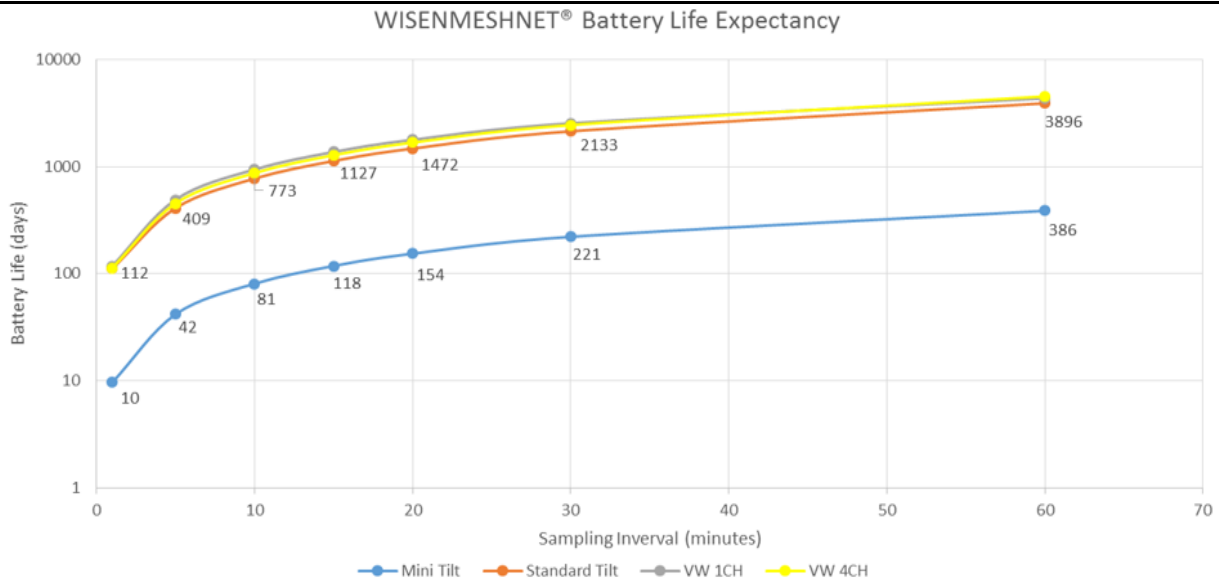

B-Type Smart Gateway

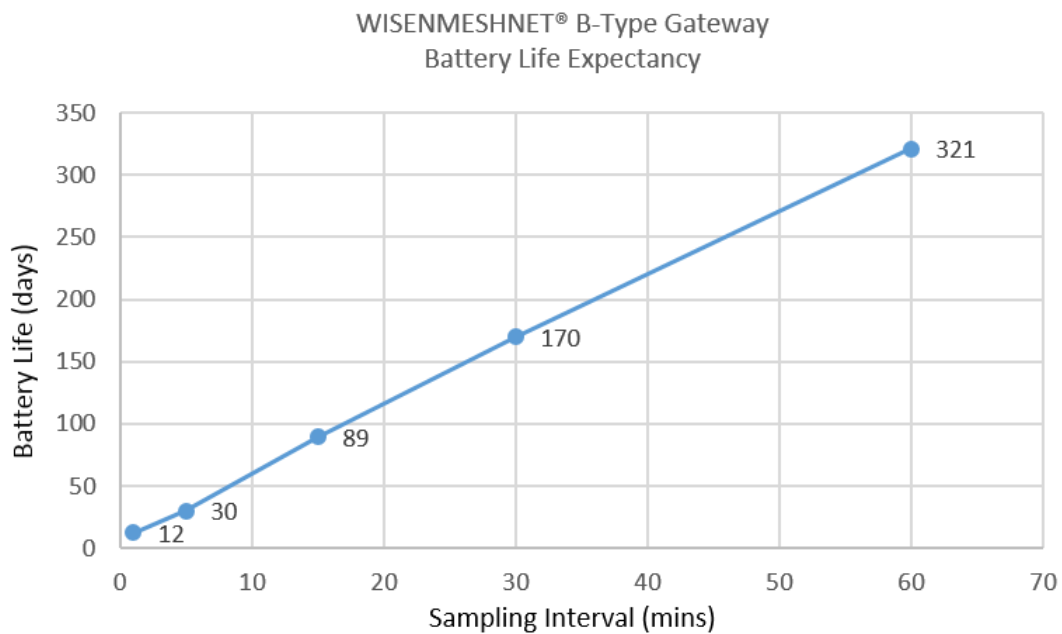


Figure: B-Gateway Battery Life (75% of the above values when there are more than 15 nodes taken under one gateway).

(Note: battery life can be further extended by a factor of 1.5, if a B-Gateway is 1/6 times (i.e., DTU_T=6) often making connections to a server.)

Laser Distance Node

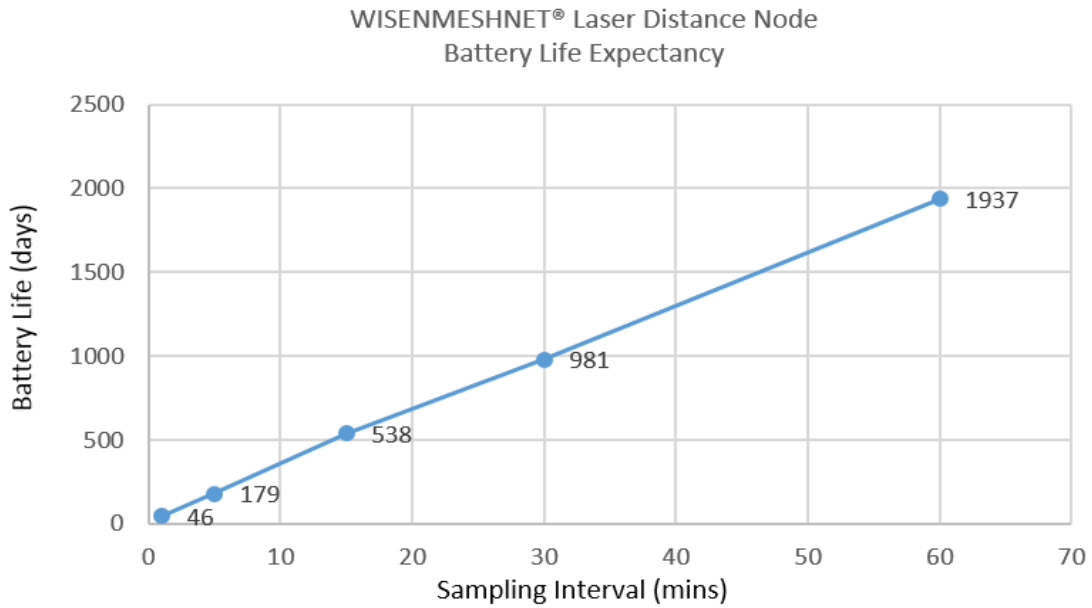


Figure: Best Case (i.e., taking < 3.0s to complete a data reading at each T, as a leaf node).

(Note: The worst case is determined by the combination of two factors: A. 10-hop mesh topology of a factor 1.2 worse than the best case battery expectancy); B. the time that takes to measure the distance for a laser module, typically it is 2.7-2.9s, in general this is affected by target surface and light pollution, this can be a factor of 10-15 worse to normal battery life of a laser distance node.)

2-Channel 4-20mA/1-5V Interface Node

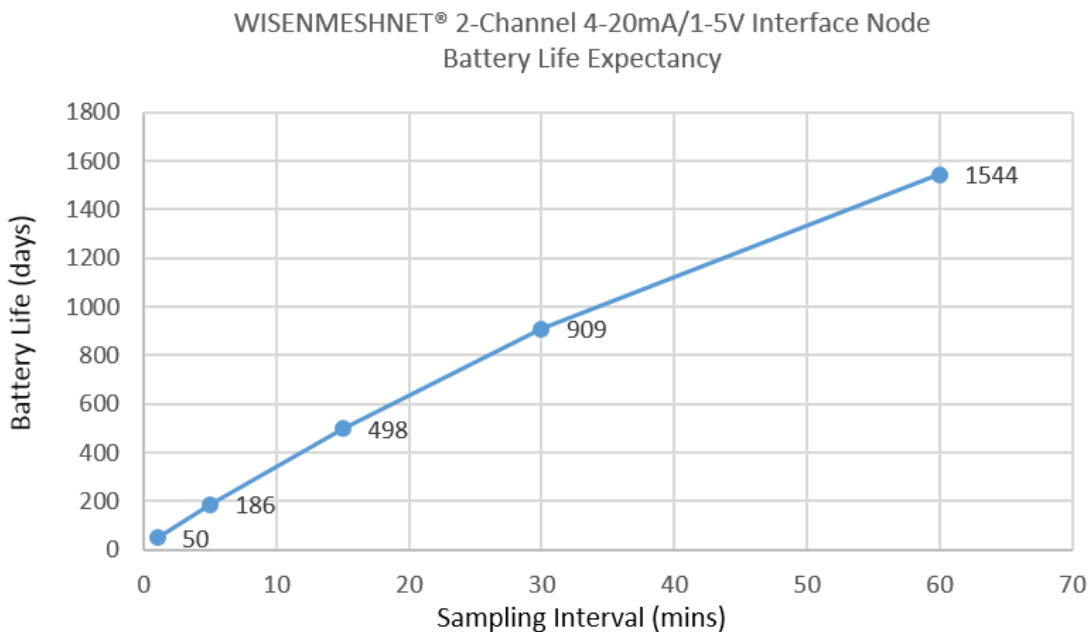






Figure: Best Case (as a leaf node).

(Note: 1. The test is done when two 4-20mA temperature sensors are both connected to a node at a room temperature of 25°C. The sensors are as the link below: <http://www.micro-epsilon.com/temperature-sensors/index.html?sLang=us>

2. The worst case is determined by 10-hop mesh topology, it is a factor of 1.2 worse than the best case battery expectancy.)

Network Data Arrival Rate
Into WISENMESHNET® greater than 99.5%
Single Node Environmental Coverage
<ul style="list-style-type: none"> A. Clear office corridor, line of sight, directly placed on the ground, $\geq 25\text{m}$; B. Clear office corridor, line of sight, 1m above the ground, $\geq 70\text{m}$; C. Inside Metro Tunnels (antenna placed at 10cm away from the wall) $\geq 100\text{m}$; D. Outdoor (Tx and Rx unit placed at 2m above ground) $\geq 250\text{m}$.


Data Format	
Basic Information	Time Stamp: Universal Time Coordinated (i.e., UTC)
	SN and Short ID
Network Information	Gateway includes: <ol style="list-style-type: none"> 1. Mesh Network Information, i.e., no. of hops, sequential number of transmission, parent node SN, received power strength, transmit power strength. 2. System Information, Sampling Time Interval (T), radio frequency (F), Back_Time, Signal Threshold (radio power strength threshold), Relay_Factor.
	Node includes: no. of hops, sequential number of transmission, parent node SN, received power strength, transmit power strength and no. of messages unsent in a node.
Sensor Information	Node Type
	Sensor Information: <ol style="list-style-type: none"> 1. Power information includes: battery voltage, key reference voltage, etc.; 2. Sensor parameters.
Remote Commands	
Time Interval	Systematically changing the sampling time interval (T) of the nodes under a gateway.
DTU_T	Server Connection Ratio to Time Interval
Radio Frequency	Systematically changing the radio channel (F) of the nodes under a gateway.
Back_Time	Defining the time taken for all the data from the nodes to reach a gateway.
Signal Threshold	Systematically changing the radio power threshold so it can join into a mesh network so a mesh can be optimised.
Relay_Factor	Systematically changing the relay time for all the node in a gateway so a mesh can be optimised.
APN Settings	Allowing a customer to change the APN/User Name/Password for the 2/3/4G Network setting.

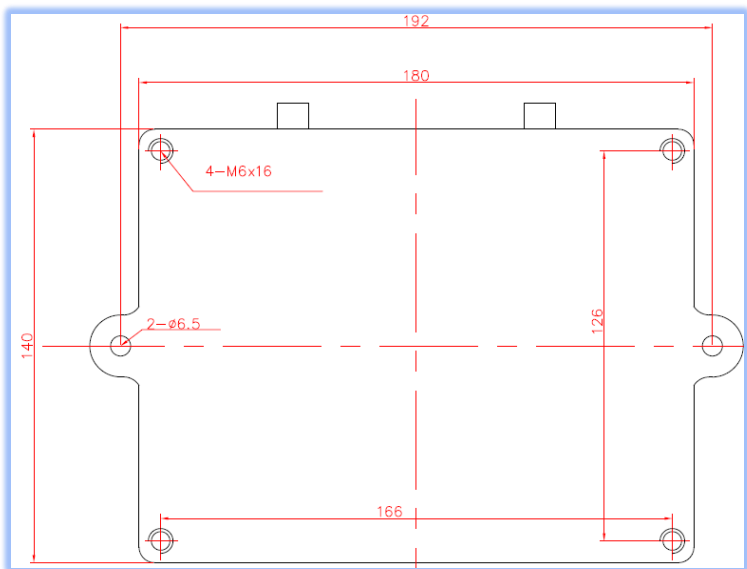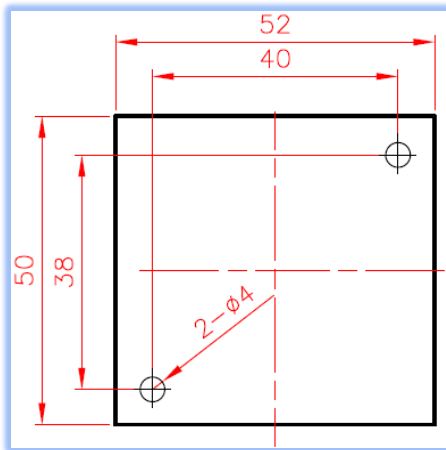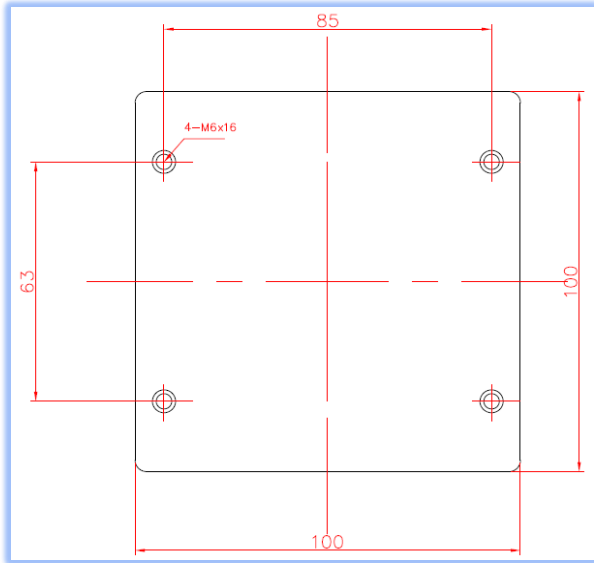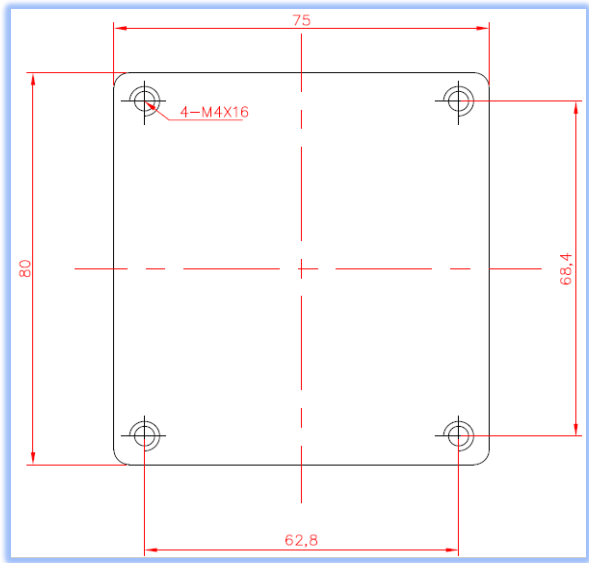Casing Back Hole Dimension*			
180x140x60mm Case Back Hole Dimensions		52x50x40mm Case Back Hole Dimensions	
			
100x100x60mm Case Back Hole Dimensions		80x75x57mm Case Back Hole Dimensions	
			

* The table for back hole fixing dimensions are used for customers to design their own brackets in various applications.

WISENMESHNET® External Power Units

M101 Type - WISENMESHNET® Solar Unit (for B-Gateway & 4-20mA Interface Node) @25°C		
Basics		
Battery Power	Rechargeable Package (LiFePO4)	
DC Output Voltage	11.2V-14.6V	
Capacity when fully charged	5AHr	
Solar Panel	10W	
Single Re-charging Duration	8-12Hr	
L x W x H	180 x 140 x 60mm (without bracket)	
Weight	2.2kg	
B-Gateway Operating Duration		
	Time Interval(T/min)	Working Days*
	1	2
	5	5
	15	15
	30	28
	60	52**
<p>* Assumption: we assume that the local mobile 3G/4G networking is covered properly;</p> <p>** Notice: to further extend the operating duration, please consult with our engineers.</p> <p>*** Notice: Solar package must have the 4 internal ER34615 batteries installed as a backup UPS to avoid continuous strong sun light day or cloudy days.</p>		
Industrial Standard		
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)	
IP Rating	>= IP66	
Operating Temperature	-35 to 65°C	
Installation Guidance		
<p>Notice: Take special attention when handling the high capacity battery package;</p> <p>Installation Procedures:</p> <p>1. Ensure that the output switch on a solar unit is in “OFF” status before any operation of wiring.</p> <p>2. Ensure the “+” and “-” wires are connected absolutely correct to the “+” and “-” terminals in the unit, including:</p> <p>A. PCB Recharge “+” & “-” terminals to Rechargeable Battery Unit “+” & “-” plug;</p>		

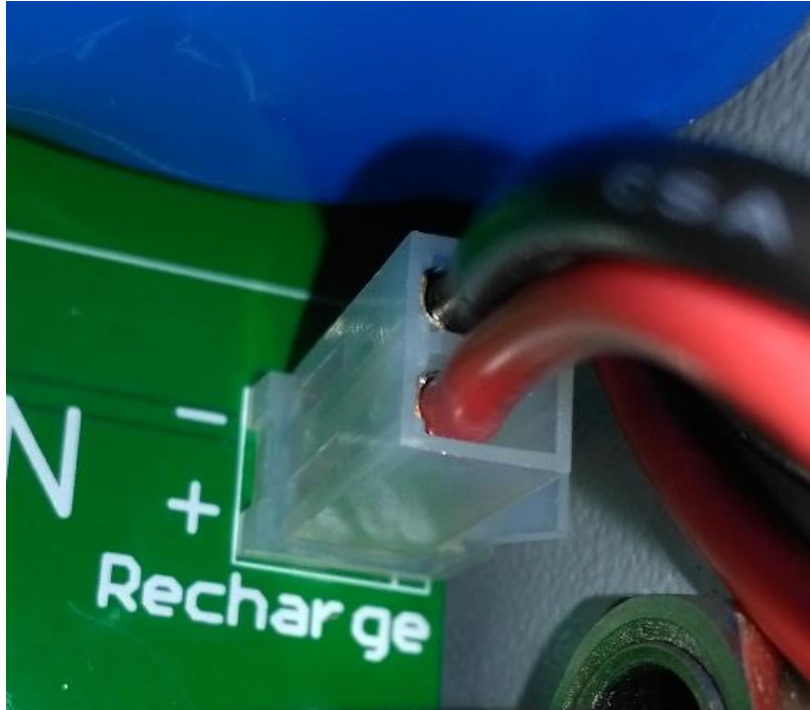

- B. PCB Power_Out “+” & “-” terminals to B-Gateway “+” & “-” terminals;
 - C. PCB Solar_In “+” & “-” terminals to External solar panel “+” & “-” terminals.
3. When the wirings are checked, ensure the unit is switched “ON”, so the power output is activated.

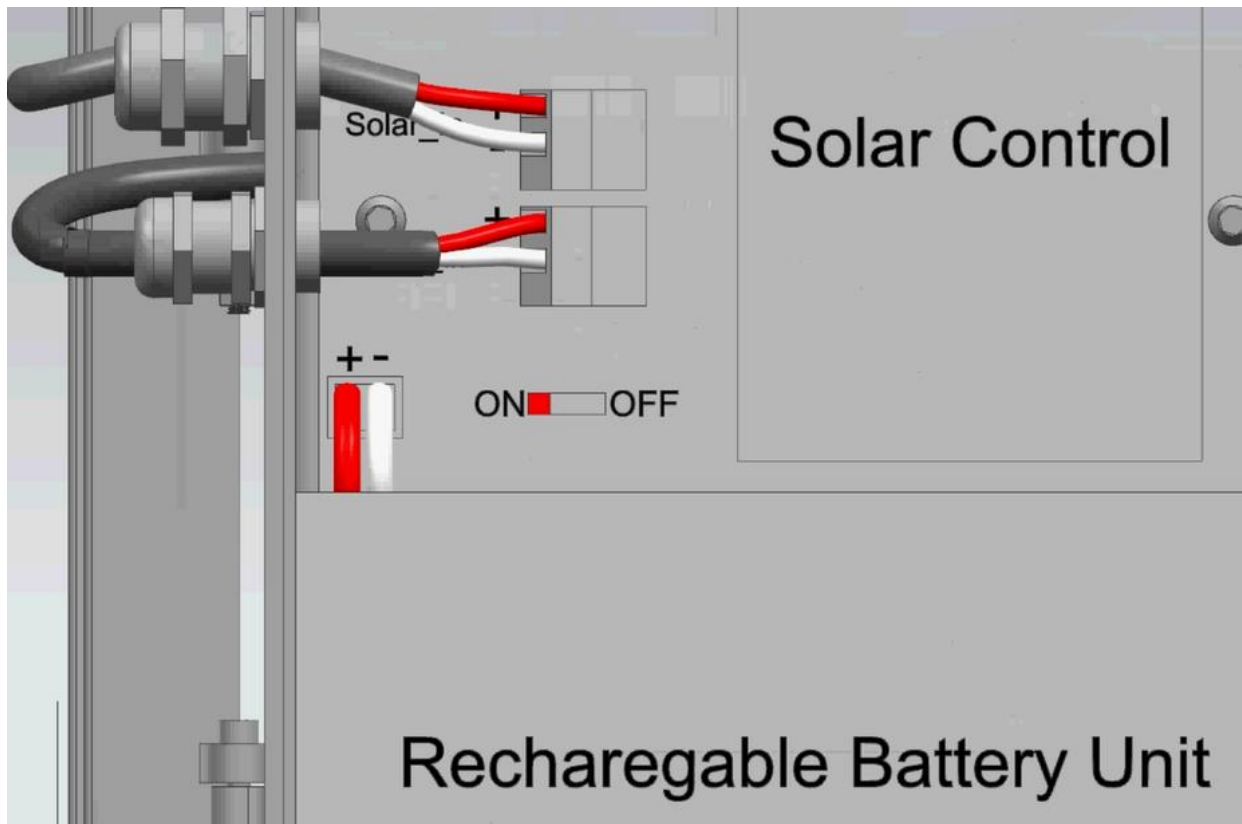


Figure. Solar unit – wiring and ON/OFF switch.

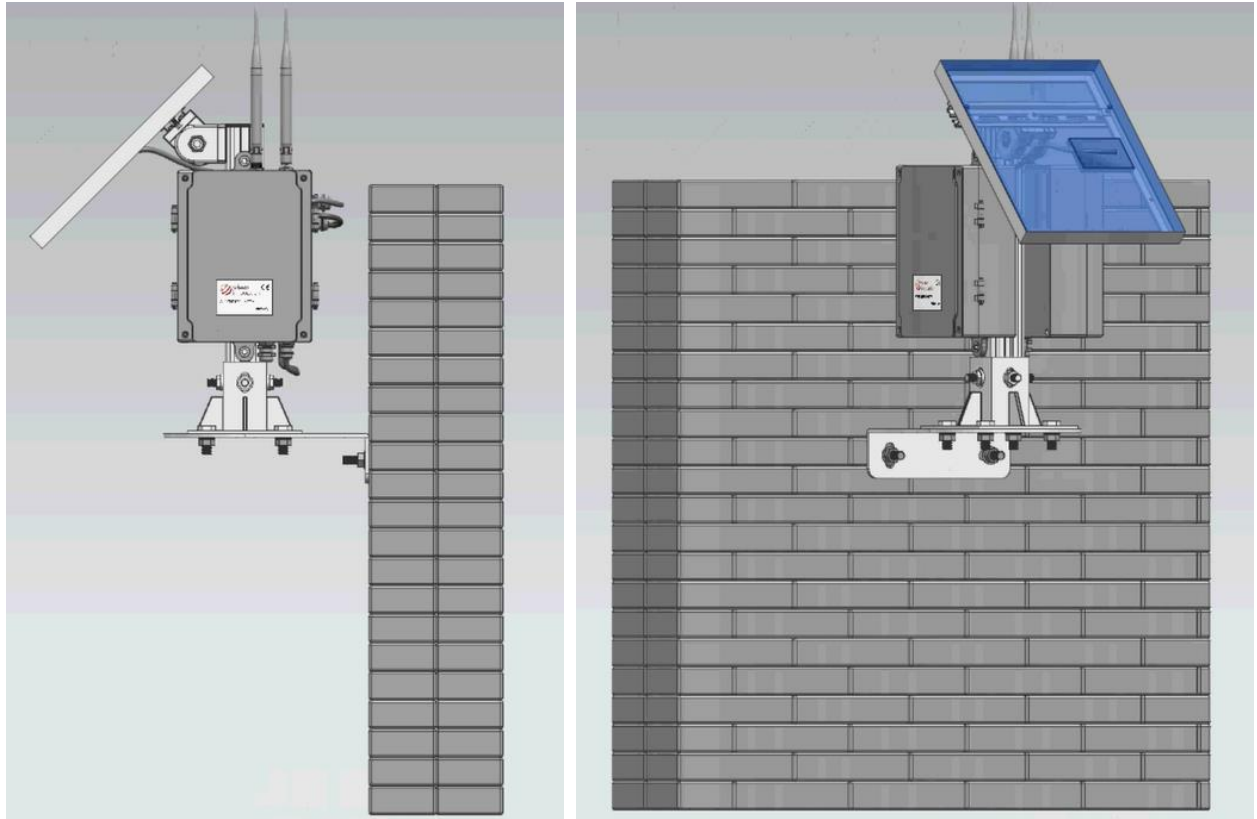
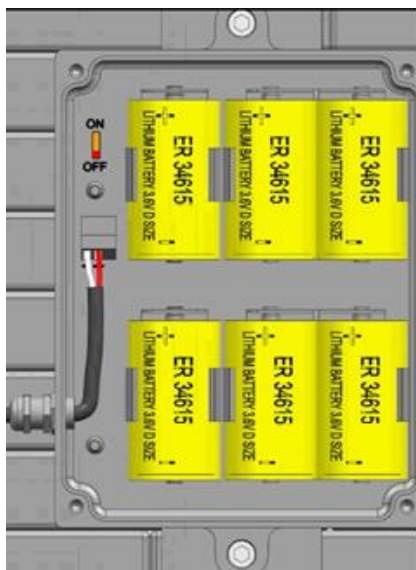


Figure. Solar unit – Overview.

M001/ M002 Type - WISENMESHNET® Battery Unit (for B-Gateway) @25°C		
Basics	M001 (Unit for 1004-B-Gateway)	M002 (Unit for 1005-C-Gateway)
Battery Power	Qty. x 6 (3.6V Lithium primary D-Cell ER3461)	
Battery Connection	Standard Aluminium Battery Holder	
DC Output Voltage	8V-10.8V	2.6V-3.6V
Capacity when fully charged	29AHr	80AHr
L x W x H	180 x 140 x 60mm	
Weight	2.2kg	
B-Gateway Operating Duration		
	Time Interval(T/min)	Working Days*
	1	15
	5	38
	15	112
	30	212
	60	401**
* Assumption: we assume that the local mobile 3G/4G networking is covered properly;		
** Notice: to further extend the operating duration, please consult with our engineers.		
Industrial Standard		
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)	
IP Rating	>= IP66	
Operating Temperature	-40 to 85°C	
Installation Guidance		
Notice: Take special attention when handling the high capacity battery package;		
Installation Procedure:		
1. Ensure that the output switch on a solar unit is in “OFF” status before any operation of wiring.		
2. Ensure the “+” and “-” wires are connected absolutely correct to the “+” and “-” terminals in the unit;		
3. When the wirings are checked, ensure the unit is switched “ON”, so the power output is activated.		
		
Figure. Battery unit - internal layout.		

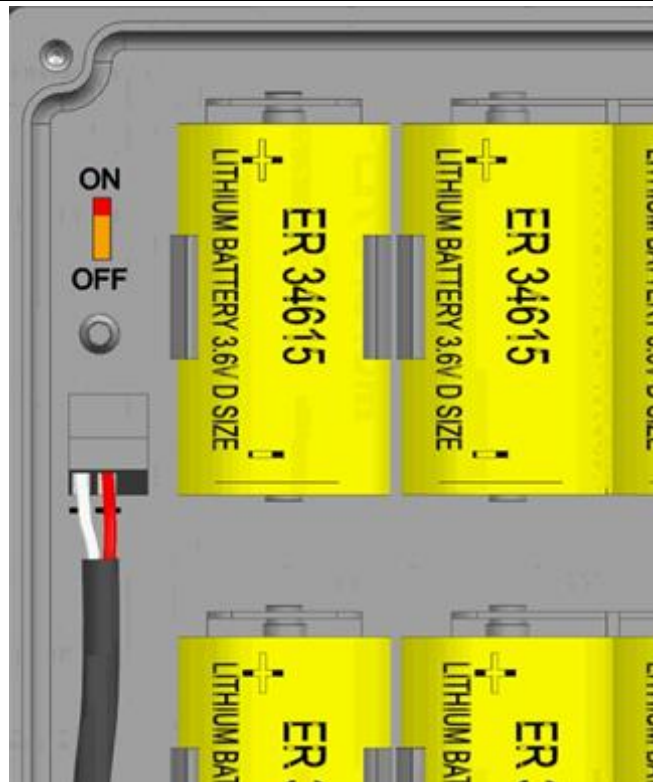


Figure. Battery unit – wiring and ON/OFF switch.

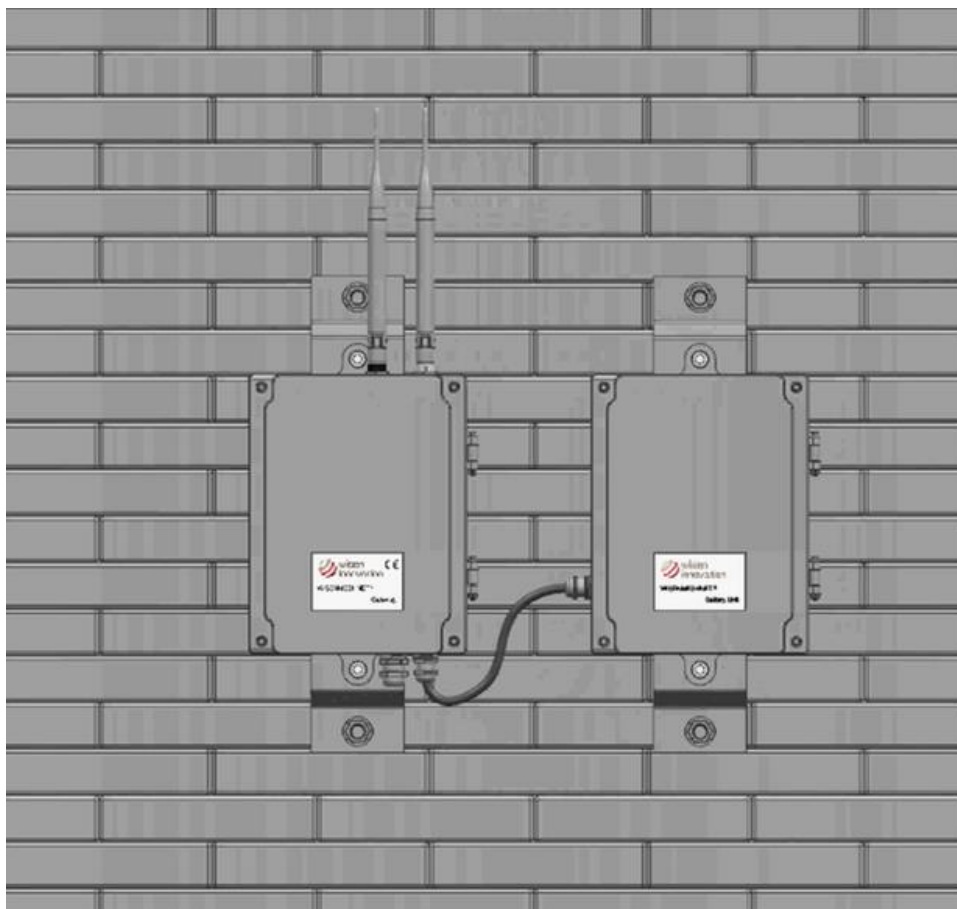


Figure. Battery unit – Overview.

WISENMESHNET® Visual/Camera Series

3001 Type - WISENMESHNET® Camera Node @25°C		
Basics		
Primary Battery Power	Qty. x 4 (3.6V Lithium primary D-Cell ER34615)	
Battery Life	Sampling Time Interval - T/min	Days
	5 (Minimum Supported)	14
	15	36
	30	48
	60	72
Secondary DC Power	7V - 32VDC (Min. Current >= 2Amp, e.g. 110-240VAC to 12VDC adaptor) or Solar Unit	
Mobile Network Stop Voltage	2.65V	
Local Storage	>=180 days @T=10min, i.e., 26000 Images	
L x W x H	180 x 140 x 60mm	
Weight	<= 2.0kg	
No. of LEDs	LED x 3 of Green/Blue/Red Colours	
LED Flashing Frequency	Red Warning (the highest warning level)	On for 100ms, Off for 1900ms
	Blue/Yellow Warning	On for 100ms, Off for 2900ms
	Green/Low Power Green Mode (normal level)	On for 100ms, Off for 3900ms
LED Update Interval	1-60min	
Image Taken Interval	5-60min	
Cable Gland	Qty. 1 x EMC-CMA12 for Camera connection Qty. 1 x EMC-CMA14 for external DC input power connection	
Camera Image		
Image sensor	CMOS 2MP Colour	
Image resolutions	1920 x 1080	
Image compression	JPEG	
Angle of view	120°	
External Cable Length	1.0m	
Night vision image	Black/White	
Night Vision Distance	8m	
Operating Temperature	-20 to 60°C	
IP Rating	>= IP66	
External Interface		
Wireless Module	Compatible with 2G/2.5G/3G/4G of Micro SIM card	
Wired Port	RS232	
WSN Interface		
Mesh Wireless Interface	WISENMESHNET® Protocol	


Standard System Parameter	
Voltage	Accuracy: +/-0.1V
Industrial Standard	
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)
IP Rating	>= IP66
Operating Temperature	-20 to 60°C
Fire Proof	Approved
Certificates	-
Re-Calibration Method	
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)
Applications	
<ol style="list-style-type: none"> When a camera node is deployed at Control centre/Data centre, the LED warnings can be configured with one or more projects. So that a visual warning system can be established in the centre. This frees the operators from frequent checking of warning emails; When a camera node is deployed on site: A. the image data can help on illustrating the progress of the construction works; B. the LED warnings can present a systematic visual warning to the on-site team so that the maximum safety can be achieved. <p>Note: Camera node relies on a working 3/4G connection, so its image data can be transferred properly and further more, the LED warnings can be received from a remote control centre.</p>	
Non-Standard Accessory	
<ol style="list-style-type: none"> RS232 to USB connection cable; Outdoor adaptor, IP68: 110-240VAC to 12VDC@5.0A. 	
Highlights	
<ol style="list-style-type: none"> When a Camera Node connected to a remote server, "NET" LED on the PCB board will be constantly on; Please do not stare at the flashing LEDs at close distance. 	
Installation Consequent	
	
Figure. Camera Node (Left) & Visual Node (Right)	



Figure. Image taken during daytime.



Figure. Image taken during night time.

3101 Type - WISENMESHNET® Visual Node @25°C					
Basics					
Battery Power	Qty. x 1 (3.6V Lithium primary D-Cell ER34615) (External power unit supported)				
Stop Voltage	2.1VDC				
No. of LEDs	LED x 1 of Green/Blue/Red Colours				
Battery Life	Sample Interval	Low Power Green/month	Green/month	Blue/month	Red/month
	T=1min	5.9	2.2	1.6	0.78
	T=5min	11.2	2.7	1.8	0.82
LED Flashing Frequency	Red Warning (the highest warning level)		On for 100ms, Off for 1900ms		
	Blue/Yellow Warning		On for 100ms, Off for 2900ms		
	Green/Low Power Green Mode (normal level)		On for 100ms, Off for 3900ms		
Working Current (DC)	Max. 90mA (Typ. 8mA)				
L x W x H	100 x 100 x 60mm				
Weight	0.65kg				
WSN Interface					
WSN Protocol	WISENMESHNET® Protocol				
Industrial Standard					
Casing and Painting Materials	Aluminium-Alloy Die Castings 12 (Epoxy Polyester Powder Coating)				
IP Rating	>= IP66				
Operating Temperature	-40 to 80°C				
Fire Proof	Approved				
Certificates	-				
Re-Calibration Method					
Inspection Period	Every 3 Years by Manufacturer (or inspected by arranged methods)				
Applications					
<div>1. A visual node provides a unique solution to issue an on-site visible LED coloured light warning for a paired Wisen node. There are 2 levels of warning triggers that can be configured, i.e., blue and red. Once the paired Wisen node reading is beyond a trigger level, then the related LED colour will be flashing at the visual node. This gives great advantages to structure builders and service users to directly act upon the real time sensing and protect people from any potential structural disaster; Note: the changes of LEDs on visual nodes do not rely on the warning issues from the control centre. It solely listens to the paired sensor node, so as long as the paired sensor node is transmitting data, then a close to real time warning is achieved from a visual node.</div> <div>2. Usage: a visual node can be installed at the locations where hazard is possibly to appear, such as excavating sections, land sliding regions;</div> <div>3. Scope: Visual warning can be applied to 1F06, 1302 and 1304 series nodes;</div> <div>4. Configuration setup:<div>A. One visual node & one sensor node set with visual warnings;</div><div>B. USB Mini Gateway Device + Windows Laptop + Wisen Visual Node Configuration Software;</div><div>C. Key in blue and red triggers on the software until a successful feedback is received.</div></div>					
Notice					
<div>1. The configuration setup is suggested to be performed after sensor node is installed, so that the initial reading is</div>					

better known.

2. Installing Visual Node $\leq 50\text{m}$ away from paired node, line of sight.