



2 sec = OFF




Transportation



User Manual:



www.leica-geosystems.com





IEC 60825-1:2014 | $\lambda=620-690\text{nm}$ | $P_{\text{max}} < 1\text{mW}$ | $t_p = 35-65\mu\text{s}$, cw

SAP. No. 864429


- when it has to be right

Leica
Geosystems

Adapter setup

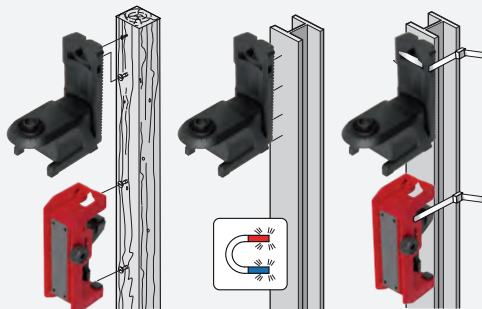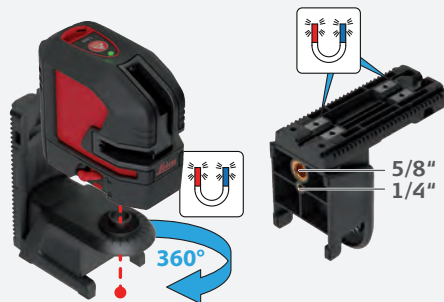

Usable with UAL 130

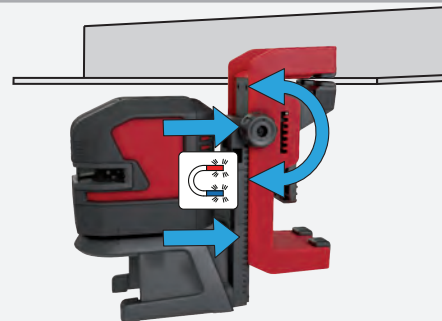

Quick Start Leica Lino P5

Status LED

Laser key

Battery pack

Window of plumb
up point

Window of horizontal
transfer points

Levelling lock

Tripod thread 1/4"

Window of plumbing




- when it has to be right

Leica
Geosystems


Insert batteries/Li-Ion



1x - Laser on

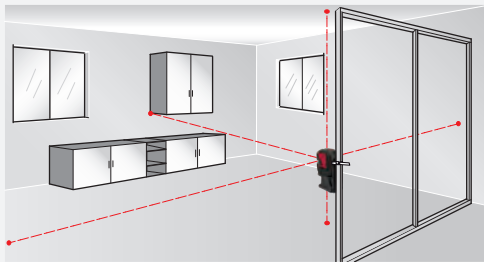

3x - Vertical mode

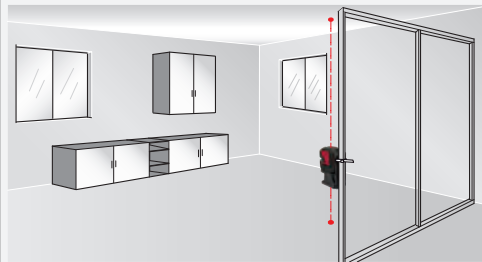


Charging Li-Ion battery



Self levelling / Levelling lock



2x - Horizontal mode

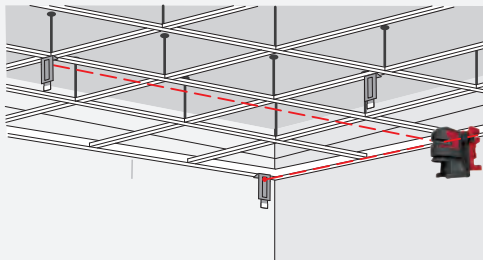

Status LED



- Normal operation
- Instrument locked
- Low battery
- Out of level